

# 2WD/4WD ROUGH TERRAIN FORKLIFT



HANGCHA FORKLIFT CANADA INC.

Company address:  
100-3801 F.-X.-Tessier,  
Vaudreuil-Dorion, QC J7V 5V5

Tel: 877-319-4232  
info@hcforkliftcanada.com  
www.hcforkliftcanada.com



Follow us on  
Facebook



Follow us on  
YouTube



Follow us on  
WeChat



Download "Hangcha  
Forklift" App



ISO 45001:2018



ISO 14001:2015



ISO 9001:2015



HANGCHA trucks conform  
to the European Safety  
Requirements.

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

2025 VERSION 7/COPYRIGHT 2025/10



## 2WD/4WD Rough Terrain Forklift

with capacities of 5,000 to 10,000kg

The World of Hangcha




# HANGCHA be with you at every stage

Efficient, reliable solutions for your demands

## STAGE V

With Hangcha you can meet all Stage V emissions standards which provides customer demands for value, innovation and performance. Designed and optimised to every engine model, our forklift truck maximises efficiency and reliability.

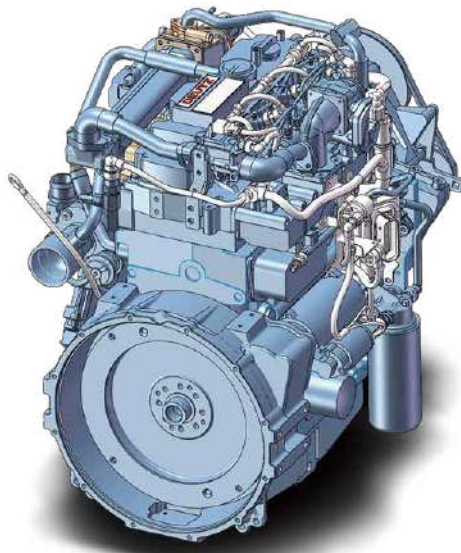


### DEUTZ

Technical Route:  
TCI+CR+EGR+DOC+DPF



Used for Deutz engine  
Interactive instrument: The instrument has CAN bus communication function. The communication protocol is compatible with CANopen and SAE J1939 standards.

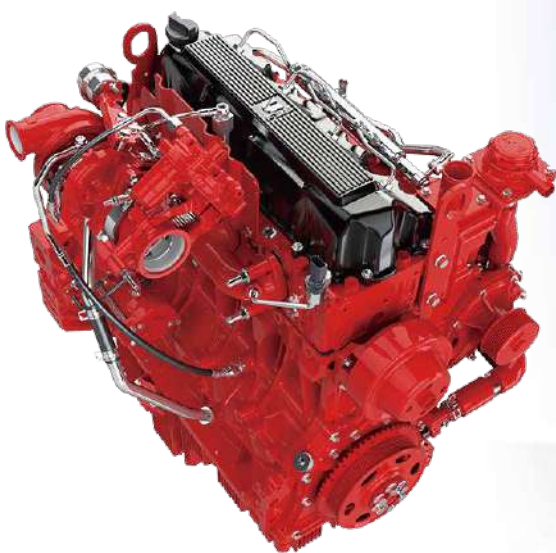

### CUMMINS

Technical Route:  
TCI+CR+DOC+DPF+SCR



Used for CUMMINS engine  
Interactive instrument: The instrument adopts LCD display with four interactive buttons, and has one CAN bus communication function. The communication protocol is compatible with SAE J1939 standards.



Powerful/  
Efficient/  
Reliable

### HANGCHA Forklift with StageV

| No. | Capacity | Series | Manufacturer | Engine     | Drive power | Model             | Emission Std.         | Transmission | Power (kw/rpm) | Service brake |
|-----|----------|--------|--------------|------------|-------------|-------------------|-----------------------|--------------|----------------|---------------|
| 1   | 5.0t     | RT     | DEUTZ        | TCD 3.6 L4 | Diesel      | CPCD50-XW95E-RT2  | EU stageV/EPA Tier 4F | China        | 55.4/2300      | Wet brake     |
| 2   | 5.0t     | RT     | DEUTZ        | TCD 3.6 L4 | Diesel      | CPCD50-XW95C-RT4  | EU stageV/EPA Tier 4F | China        | 55.4/2300      | Wet brake     |
| 3   | 7.0t     | RT     | CUMMINS      | F3.8       | Diesel      | CPCD70-XH16C-RT4  | EU stageV/EPA Tier 4F | China        | 90/2200        | Wet brake     |
| 4   | 7.0t     | RT     | CUMMINS      | F3.8       | Diesel      | CPCD70-XH16E-RT2  | EU stageV/EPA Tier 4F | China        | 90/2200        | Wet brake     |
| 5   | 10t      | RT     | CUMMINS      | F3.8       | Diesel      | CPCD100-XH16C-RT4 | EU stageV/EPA Tier 4F | China        | 90/2200        | Wet brake     |

Note: Stage V applied for European Union also including Israel and Turkey

## CONCEPT

HANGCHA rough terrain forklift with 2WD/4WD was developed on the basis of the XF series of Hangcha. It adopts the Deutz and Cummins engine, which is powerful and reliable, easy to maintain; It can adapt to the rugged roads in the stone market, timber market, construction sites, etc., as well as the wet and slippery roads in rain and snow.

**2WD**  
ROUGH TERRAIN

**4WD**  
ROUGH TERRAIN



## Safety


- / Thanks to the steering oil circuit and the brake oil circuit are independent of each other, thereby reducing the interference of the brake on the steering, the hydraulic braking system is very safe.
- / With the structure of brake valve plus the accumulator, it is safer and reliable.
- / The returned oil filtration device is taken as the standard configuration to extend the service life of the hydraulic elements.
- / OPS function is available for option, work is safer and reliable.

## Comfort

- / With the suspension and integrated overhead guard, full-floating transmission, complex engine shock absorber and suspension seat, driving is more comfortable, and the vibration and noise of the truck can be reduced.
- / The extra foot space is provided to reduce operator fatigue significantly, non-slip step makes getting in and out easy and safe. The new designed steering wheel, new brake system and the easy-to-operate levers provide total handling operation.
- / Excellent upward visibility is provided by a large roof screen, in fact, visibility all-round is excellent.

## 4 drive wheel multi-gears transmission

- / The hydraulic transmission box of the multi-gear 4WD transmission electro-hydraulic commutation, with electronically controlled decoupling function (one-key switching between 4WD and 2WD), provides higher running speed and greater climbing ability.

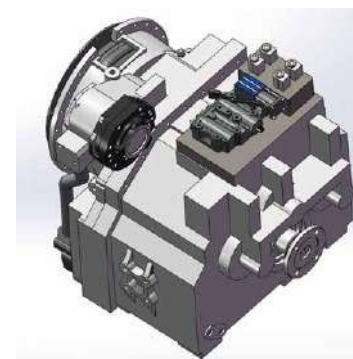

- / 5t transmission gears are 3 in the front/1 in the back, 7t/10t transmission gears are 3 in the front/3 in the back.

## Easy maintenance

- / The two-piece design makes the floorboard easy to lift and remove for access to the power train.
- / The radiator cover can be turned easily by hand to enable quick inspections or servicing.



The easy-to-open hook provides quick access to the engine compartment



The tilt angle of the mast is 15° in the front/15° in the back, which is more suitable for loading, unloading and transportation of goods in off-road conditions



Oscillating steer axle allows either wheel to step over obstacles keeping the truck and load level



To achieve maximum productivity, a rough terrain forklift operator needs to be comfortable and in control. We've created a workplace that gets the best from your operators and your machinery

## Reliability

- / The reinforced truck chassis with CAE simulation software, optimized design is conducted for the tilt cylinder and steering drive axle installation.
- / Dual air filters and two-stage air filter are taken as the standard configuration to guarantee that the engine can operate for long time and under the optimal status.
- / Deutz engine adopt, "TCI+CR+EGR+DOC" technical route. Adopt EURO III B/Tier4F emission can be met, and it is energy-saving and environment-friendly; A turbo engine further enhances performance at low engine speeds for improved power and tractive effort.



The differential is specifically designed for rough terrain and features manual differential lock providing ultimate traction during inclement weather conditions and rough operating surfaces, it differerntial lock prevents power loose when one wheel spins.



Full-floating hydraulic drive gear box has the function of switching between 2WD and 4WD, and can provide higher run speed and stronger climbing ability;

Higher specification fork mounting level-IVB(5t/7t), more weight can be loaded.



Front tyre

Rear tyre



## Productivity

*The transmission system gets the maximum performance from the engine without reaching high revolutions, which provides fuel saving, noise level reduction and engine life increase.*



The new Dynamic load sensing hydraulic steering system contributes to reduce loss of hydraulic and improve energy efficiency.



The new efficiency lighting system employs LED illuminant and new type reflector to reduce energy consumption, improve significantly illumination performance and prolong work time.



Wet brake offers maximum service life for your brake system.

## Maneuverability

The distance to ground is 370mm, it offers greater maneuverability and keep the truck moving in the roughest of applications, and yet we keep a very low center of gravity, by using a distributed weight in the forklift, giving it an excellent stability.





## Standard specification

- / Counterweight cover
- / Full-suspension seat
- / Dual air filters
- / High-position exhaust
- / Fuel tank cover (with lock)
- / Fan protection device
- / Rear working light
- / Alarm light
- / Emergency switch
- / Right and left reflective mirrors
- / PVC ceiling
- / Wet brake
- / Mud baffle provided with rigging hole

## Options

- / Front windshield and wipers
- / Cab (warm air blower and fan are available for option)
- / Engine cover with lock
- / Engine cover with dual sound insulation cushion
- / Engine cover with lock+ dual sound insulation cushion
- / 3rd/4th/5th valve
- / Voice type reversing buzzer
- / Blue light lamp
- / Low-temperature cold start-up battery (-20 ℃)
- / OPS system
- / OPS system & Compatible with Sequential Seat Belt Interlock System



## 5t Mast: (pneumatic)

| Type                             | Model     | Max.fork height | Overall height |                  |               |                  | Free lift     |     | Front Overhang | Tilt range |                                                 | Capacity max height Load Center 24in(600mm)    |    |
|----------------------------------|-----------|-----------------|----------------|------------------|---------------|------------------|---------------|-----|----------------|------------|-------------------------------------------------|------------------------------------------------|----|
|                                  |           |                 | Lowered        | Extended         |               | Without backrest | With backrest | FWD |                | BWD        | ISO 22915-2<br>Counterbalanced trucks with mast | ISO 22915-13<br>Rough-terrain trucks with mast |    |
|                                  |           |                 |                | Without backrest | With backrest |                  |               |     |                |            |                                                 |                                                |    |
|                                  |           |                 |                |                  |               |                  |               |     |                |            |                                                 |                                                | mm |
| Wide view mast                   | RTC50M300 | 3000            | 2685           | 4183             | 4534          | 170              | 170           | 735 | 15             | 15         | 11000(5000)                                     | 11000(5000)                                    |    |
|                                  | RTC50M330 | 3300            | 2835           | 4483             | 4834          | 170              | 170           | 735 | 15             | 15         | 11000(5000)                                     | 11000(5000)                                    |    |
|                                  | RTC50M350 | 3500            | 2935           | 4683             | 5034          | 170              | 170           | 735 | 15             | 15         | 11000(5000)                                     | 11000(5000)                                    |    |
|                                  | RTC50M370 | 3700            | 3035           | 4883             | 5234          | 170              | 170           | 735 | 15             | 15         | 11000(5000)                                     | 11000(5000)                                    |    |
|                                  | RTC50M400 | 4000            | 3185           | 5183             | 5534          | 170              | 170           | 735 | 15             | 15         | 11000(5000)                                     | 11000(5000)                                    |    |
|                                  | RTC50M450 | 4500            | 3485           | 5685             | 6034          | 170              | 170           | 735 | 15             | 15         | 10450(4750)                                     | 10120(4600)                                    |    |
|                                  | RTC50M500 | 5000            | 3735           | 6185             | 6534          | 170              | 170           | 735 | 15             | 15         | 9240(4200)                                      | 9020(4100)                                     |    |
| Wide view full free triplex mast | RTC50N400 | 4000            | 2760           | 5470             | 5534          | 1300             | 1051          | 804 | 15             | 15         | 11000(5000)                                     | 11000(5000)                                    |    |
|                                  | RTC50N430 | 4300            | 2850           | 5740             | 5834          | 1420             | 1141          | 804 | 15             | 15         | 10120(4600)                                     | 9900(4500)                                     |    |
|                                  | RTC50N450 | 4500            | 2910           | 5920             | 6034          | 1500             | 1201          | 804 | 15             | 15         | 9460(4300)                                      | 9020(4100)                                     |    |
|                                  | RTC50N480 | 4800            | 3010           | 6220             | 6334          | 1600             | 1301          | 804 | 15             | 15         | 9020(4100)                                      | 8580(3900)                                     |    |
|                                  | RTC50N500 | 5000            | 3060           | 6399             | 6534          | 1671             | 1351          | 804 | 10             | 15         | 8580(3900)                                      | 7700(3500)                                     |    |
|                                  | RTC50N550 | 5500            | 3260           | 6970             | 7034          | 1800             | 1551          | 804 | 10             | 15         | 7040(3200)                                      | 5720(2600)                                     |    |
|                                  | RTC50N600 | 6000            | 3410           | 7420             | 7534          | 2000             | 1701          | 804 | 10             | 15         | 6160(2800)                                      | 5060(2300)                                     |    |

Note: ISO 22915-2 for industrial use; ISO 22915-13 for rough terrain use.  
With integral sideshifter minus 400kg;with sideshifter minus 500kg.

## 7t Mast: (pneumatic)

| Type                             | Model     | Max.fork height | Overall height |                  |               |                  | Free lift     |     | Front Overhang | Tilt range |                                               | Capacity max height Load Center 24in(600mm)    |  |
|----------------------------------|-----------|-----------------|----------------|------------------|---------------|------------------|---------------|-----|----------------|------------|-----------------------------------------------|------------------------------------------------|--|
|                                  |           |                 | Lowered        | Extended         |               | Without backrest | With backrest | FWD |                | BWD        | ISO 22915-2<br>Rough-terrain trucks with mast | ISO 22915-13<br>Rough-terrain trucks with mast |  |
|                                  |           |                 |                | Without backrest | With backrest |                  |               |     |                |            |                                               |                                                |  |
|                                  |           | mm              | mm             | mm               | mm            | mm               | mm            | mm  | (°)            | (°)        | lb(kg)                                        | lb(kg)                                         |  |
| Wide view mast                   | RTC70M300 | 3000            | 2935           | 4385             | 4534          | 175              | 175           | 740 | 15             | 15         | 15500(7000)                                   | 15500(7000)                                    |  |
|                                  | RTC70M330 | 3300            | 3095           | 4685             | 4834          | 175              | 175           | 740 | 15             | 15         | 15500(7000)                                   | 15500(7000)                                    |  |
|                                  | RTC70M350 | 3500            | 3185           | 4885             | 5034          | 175              | 175           | 740 | 15             | 15         | 15500(7000)                                   | 15500(7000)                                    |  |
|                                  | RTC70M370 | 3700            | 3285           | 5085             | 5234          | 175              | 175           | 740 | 15             | 15         | 15500(7000)                                   | 15500(7000)                                    |  |
|                                  | RTC70M400 | 4000            | 3435           | 5385             | 5534          | 175              | 175           | 740 | 15             | 15         | 15500(7000)                                   | 15500(7000)                                    |  |
|                                  | RTC70M450 | 4500            | 3735           | 5935             | 6034          | 175              | 175           | 740 | 15             | 15         | 15500(7000)                                   | 15500(7000)                                    |  |
|                                  | RTC70M500 | 5000            | 3985           | 6435             | 6534          | 175              | 175           | 740 | 15             | 15         | 15500(7000)                                   | 15500(7000)                                    |  |
| Wide view full free triplex mast | RTC70N400 | 4000            | 2760           | 5470             | 5534          | 1300             | 1236          | 810 | 15             | 15         | 15500(7000)                                   | 15500(7000)                                    |  |
|                                  | RTC70N430 | 4300            | 2850           | 5740             | 5834          | 1420             | 1326          | 810 | 15             | 15         | 15500(7000)                                   | 15500(7000)                                    |  |
|                                  | RTC70N450 | 4500            | 2910           | 5920             | 6034          | 1500             | 1386          | 810 | 15             | 15         | 15500(7000)                                   | 15500(7000)                                    |  |
|                                  | RTC70N480 | 4800            | 3010           | 6220             | 6334          | 1600             | 1486          | 810 | 15             | 15         | 15500(7000)                                   | 15057(6800)                                    |  |
|                                  | RTC70N500 | 5000            | 3060           | 6399             | 6534          | 1671             | 1536          | 810 | 10             | 15         | 15500(7000)                                   | 11293(5100)                                    |  |
|                                  | RTC70N550 | 5500            | 3260           | 6970             | 7034          | 1800             | 1736          | 810 | 10             | 15         | 12843(5800)                                   | 9521(4300)                                     |  |
|                                  | RTC70N600 | 6000            | 3410           | 7420             | 7534          | 2000             | 1886          | 810 | 10             | 15         | 9743(4400)                                    | 5314(2400)                                     |  |
|                                  | RTC70N650 | 6500            | 3560           | 7899             | 8034          | 2171             | 2036          | 810 | 10             | 15         | 8857(4000)                                    | 3986(1800)                                     |  |
|                                  | RTC70N700 | 7000            | 3860           | 8570             | 8570          | 2471             | 2300          | 810 | 10             | 15         | /                                             | /                                              |  |

## 10t Mast: (pneumatic)

| Type                             | Model      | Max.fork height | Overall height |                  |    |                  | Free lift     |      | Front Overhang | Tilt range |                                                 | Capacity max height Load Center 24in(600mm)    |    |
|----------------------------------|------------|-----------------|----------------|------------------|----|------------------|---------------|------|----------------|------------|-------------------------------------------------|------------------------------------------------|----|
|                                  |            |                 | Lowered        | Extended         |    | Without backrest | With backrest | FWD  |                | BWD        | ISO 22915-2<br>Counterbalanced trucks with mast | ISO 22915-13<br>Rough-terrain trucks with mast |    |
|                                  |            |                 |                | Without backrest |    |                  |               |      |                |            |                                                 |                                                |    |
|                                  |            |                 |                | mm               | mm |                  |               |      |                |            |                                                 |                                                | mm |
| Wide view mast                   | RTC100M300 | 3000            | 3290           | 4735             | /  | 200              | /             | 932  | 15             | 15         | 22000(10000)                                    | 22000(10000)                                   |    |
|                                  | RTC100M330 | 3300            | 3440           | 5035             | /  | 200              | /             | 932  | 15             | 15         | 22000(10000)                                    | 22000(10000)                                   |    |
|                                  | RTC100M350 | 3500            | 3540           | 5235             | /  | 200              | /             | 932  | 15             | 15         | 22000(10000)                                    | 22000(10000)                                   |    |
|                                  | RTC100M360 | 3600            | 3590           | 5335             | /  | 200              | /             | 932  | 15             | 15         | 22000(10000)                                    | 22000(10000)                                   |    |
|                                  | RTC100M400 | 4000            | 3790           | 5735             | /  | 200              | /             | 932  | 15             | 15         | 22000(10000)                                    | 22000(10000)                                   |    |
|                                  | RTC100M450 | 4500            | 4090           | 6285             | /  | 200              | /             | 932  | 15             | 15         | 22000(10000)                                    | 22000(10000)                                   |    |
|                                  | RTC100M500 | 5000            | 4340           | 6785             | /  | 200              | /             | 932  | 15             | 15         | 22000(10000)                                    | 22000(10000)                                   |    |
| Wide view full free triplex mast | RTC100N450 | 4500            | 2990           | 6300             | /  | 1500             | /             | 1000 | 15             | 15         | /                                               | /                                              |    |
|                                  | RTC100N480 | 4800            | 3090           | 6600             | /  | 1600             | /             | 1000 | 15             | 15         | /                                               | /                                              |    |
|                                  | RTC100N500 | 5000            | 3190           | 6900             | /  | 1600             | /             | 1000 | 10             | 15         | /                                               | /                                              |    |
|                                  | RTC100N550 | 5500            | 3340           | 7350             | /  | 1800             | /             | 1000 | 10             | 15         | /                                               | /                                              |    |
|                                  | RTC100N600 | 6000            | 3490           | 7800             | /  | 2000             | /             | 1000 | 10             | 15         | /                                               | /                                              |    |
|                                  | RTC100N650 | 6500            | 3770           | 8380             | /  | 2200             | /             | 1000 | 10             | 15         | /                                               | /                                              |    |
|                                  | RTC100N700 | 7000            | 3940           | 8850             | /  | 2400             | /             | 1000 | 10             | 15         | /                                               | /                                              |    |

5.0-10t 2WD/4WD Rough Terrain Forklift

|                        |            |                                                                  |                                             |                        |                        |                  |                        |                       |                       |                       |                       |                       |                       |
|------------------------|------------|------------------------------------------------------------------|---------------------------------------------|------------------------|------------------------|------------------|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Distinguishing<br>mark | 1.1        | Manufacturer                                                     |                                             | HANGCHA GROUP CO.,LTD. |                        |                  |                        |                       |                       |                       |                       |                       |                       |
|                        | 1.2        | Manufacturer's type designation                                  |                                             | CPCD50-XW70C-RT4       | CPCD50-XW95C-RT4       | CPCD50-XW70E-RT2 | CPCD50-XW95E-RT2       | CPCD70-XH16C-RT4      | CPCD70-XH16E-RT2      | CPCD100-XH16C-RT4     | CPCD70-XW70C-RT4      | CPCD70-XW70E-RT2      | CPCD100-XW70C-RT4     |
|                        | 1.3        | Drive: electric (battery or mains), diesel, petrol, fuel gas     |                                             | Diesel                 | Diesel                 | Diesel           | Diesel                 | Diesel                | Diesel                | Diesel                | Diesel                | Diesel                | Diesel                |
|                        | 1.4        | Operator type: hand, pedestrian, standing, seated, order-pickler |                                             | Seated                 | Seated                 | Seated           | Seated                 | Seated                | Seated                | Seated                | Seated                | Seated                | Seated                |
|                        | 1.5        | Rated capacity/rated load                                        | Q (kg)                                      | 5000                   | 5000                   | 5000             | 5000                   | 7000                  | 7000                  | 10000                 | 7000                  | 7000                  | 10000                 |
|                        | 1.6        | Load centre distance                                             | c (mm)                                      | 600                    | 600                    | 600              | 600                    | 600                   | 600                   | 600                   | 600                   | 600                   | 600                   |
|                        | 1.8        | Load distance, centre of drive axle to fork                      | x (mm)                                      | 735                    | 735                    | 735              | 735                    | 740                   | 740                   | 932                   | 740                   | 740                   | 932                   |
|                        | 1.9        | Wheelbase                                                        | y (mm)                                      | 2150                   | 2150                   | 2150             | 2150                   | 2500                  | 2500                  | 2800                  | 2500                  | 2500                  | 2800                  |
|                        | Weight     | 2.1                                                              | Service Weight                              | kg                     | 9050                   | 9050             | 9050                   | 9050                  | 10400                 | 10400                 | 15500                 | 10400                 | 10400                 |
| 2.2                    |            | Axle loading, laden front/rear                                   | kg                                          | 12300/1750             | 12300/1750             | 12300/1750       | 12300/1750             | 15140/2260            | 15140/2260            | 22520/2980            | 15140/2260            | 15140/2260            | 22520/2980            |
| 2.3                    |            | Axle loading, unladen front/rear                                 | kg                                          | 4280/4770              | 4280/4770              | 4280/4770        | 4280/4770              | 4310/6090             | 4310/6090             | 6920/8580             | 4310/6090             | 4310/6090             | 6920/8580             |
| Tyres, chassis         | 3.1        | Tyres: solid rubber, superelastic, pneumatic, polyurethane       |                                             | Pneumatic              | Pneumatic              | Pneumatic        | Pneumatic              | Pneumatic             | Pneumatic             | Pneumatic             | Pneumatic             | Pneumatic             | Pneumatic             |
|                        | 3.2        | Tyre size, front                                                 |                                             | 445/65-22.5-18PR       | 445/65-22.5-18PR       | 445/65-22.5-18PR | 445/65-22.5-18PR       | 445/65-22.5-24PR      | 445/65-22.5-24PR      | 17.5-25-36PR          | 445/65-22.5-24PR      | 445/65-22.5-24PR      | 17.5-25-36PR          |
|                        | 3.3        | Tyre size, rear                                                  |                                             | 12.5/80-18-12PR        | 12.5/80-18-12PR        | 12.5/80-18-12PR  | 12.5/80-18-12PR        | 12.5/80-18-16PR       | 12.5/80-18-16PR       | 385/55-24.5-18PR      | 12.5/80-18-16PR       | 12.5/80-18-16PR       | 385/55-24.5-18PR      |
|                        | 3.5        | Wheels, number front / rear (x = driven wheels)                  |                                             | 2×/2×                  | 2×/2×                  | 2×/2             | 2×/2                   | 2×/2×                 | 2×/2                  | 2×/2×                 | 2×/2×                 | 2×/2                  | 2×/2×                 |
|                        | 3.6        | Tread, front                                                     | b10 (mm)                                    | 1660                   | 1660                   | 1660             | 1660                   | 1700                  | 1700                  | 2095                  | 1700                  | 1700                  | 2095                  |
|                        | 3.7        | Tread, rear                                                      | b11 (mm)                                    | 1760                   | 1760                   | 1760             | 1760                   | 1760                  | 1760                  | 1900                  | 1760                  | 1760                  | 1900                  |
|                        | Dimensions | 4.1                                                              | Tilt of mast/fork carriage forward/backward | α / β (°)              | 15/15                  | 15/15            | 15/15                  | 15/15                 | 15/15                 | 15/15                 | 15/15                 | 15/15                 | 15/15                 |
| 4.2                    |            | Height, mast lowered                                             | h1 (mm)                                     | 2685                   | 2685                   | 2685             | 2685                   | 2935                  | 2935                  | 3290                  | 2935                  | 2935                  | 3290                  |
| 4.3                    |            | Free lift                                                        | h2 (mm)                                     | 170                    | 170                    | 170              | 170                    | 175                   | 175                   | 200                   | 175                   | 175                   | 200                   |
| 4.4                    |            | Lift                                                             | h3 (mm)                                     | 3000                   | 3000                   | 3000             | 3000                   | 3000                  | 3000                  | 3000                  | 3000                  | 3000                  | 3000                  |
| 4.5                    |            | Height, mast extended                                            | h4 (mm)                                     | 4534                   | 4534                   | 4534             | 4534                   | 4534                  | 4534                  | 4735                  | 4534                  | 4534                  | 4735                  |
| 4.7                    |            | Height of overhead guard                                         | h6 (mm)                                     | 2575                   | 2575                   | 2575             | 2575                   | 2575                  | 2575                  | 2575                  | 2575                  | 2575                  | 2575                  |
| 4.19                   |            | Overall length                                                   | l1 (mm)                                     | 4865                   | 4865                   | 4865             | 4865                   | 5360                  | 5360                  | 6242                  | 5360                  | 5360                  | 6242                  |
| 4.20                   |            | Length to face of forks                                          | l2 (mm)                                     | 3665                   | 3665                   | 3665             | 3665                   | 4140                  | 4140                  | 4722                  | 4140                  | 4140                  | 4722                  |
| 4.21                   |            | Overall width                                                    | b1 (mm)                                     | 2105                   | 2105                   | 2105             | 2105                   | 2145                  | 2145                  | 2550*                 | 2145                  | 2145                  | 2550*                 |
| 4.22                   |            | Fork dimensions ISO 2331                                         | s/e/l (mm)                                  | 60×150×1200            | 60×150×1200            | 60×150×1200      | 60×150×1200            | 65×150×1220           | 65×150×1220           | 80×160×1520           | 65×150×1220           | 65×150×1220           | 80×160×1520           |
| 4.23                   |            | Fork carriage DIN 15 173 --- ISO 2328, class/type A,B            |                                             | IVB                    | IVB                    | IVB              | IVB                    | IVB                   | IVB                   | B                     | IVB                   | IVB                   | B                     |
| 4.24                   |            | Fork-carriage width                                              | b3 (mm)                                     | 1950                   | 1950                   | 1950             | 1950                   | 1950                  | 1950                  | 2150                  | 1950                  | 1950                  | 2150                  |
| 4.25                   |            | Distance between fork-arms                                       | bs (mm)                                     | 300-1950               | 300-1950               | 300-1950         | 300-1950               | 300-1950              | 300-1950              | 440-2150              | 300-1950              | 300-1950              | 440-2150              |
| 4.31                   |            | Ground clearance, laden, below mast                              | m1 (mm)                                     | 385                    | 385                    | 385              | 385                    | 385                   | 385                   | 390                   | 385                   | 385                   | 390                   |
| 4.32                   |            | Ground clearance, centre of wheelbase                            | m2 (mm)                                     | 370                    | 370                    | 370              | 370                    | 387                   | 387                   | 424                   | 387                   | 387                   | 424                   |
| Performance<br>Data    | 4.34       | Aisle width                                                      | Ast (mm)                                    | 6285                   | 6285                   | 5685             | 5685                   | 7450                  | 6120                  | 8392                  | 7450                  | 6120                  | 8392                  |
|                        | 4.35       | Turning radius                                                   | Wa (mm)                                     | 4150                   | 4150                   | 3550             | 3550                   | 5290                  | 3960                  | 5740                  | 5290                  | 3960                  | 5740                  |
|                        | 5.1        | Travel speed, laden/unladen                                      | km/h                                        | 25/25                  | 25/25                  | 25/25            | 25/25                  | 25/25                 | 25/25                 | 24/24                 | 25/25                 | 25/25                 | 24/24                 |
|                        | 5.2        | Lift speed, laden                                                | m/s                                         | 0.45/0.52              | 0.45/0.52              | 0.45/0.52        | 0.45/0.52              | 0.41/0.43             | 0.41/0.43             | 0.41/0.43             | 0.41/0.43             | 0.41/0.43             | 0.31/0.33             |
|                        | 5.3        | Lowering speed, laden                                            | m/s                                         | 0.5/0.43               | 0.5/0.43               | 0.5/0.43         | 0.5/0.43               | 0.46/0.39             | 0.46/0.39             | 0.46/0.39             | 0.46/0.39             | 0.46/0.39             | 0.46/0.39             |
|                        | 5.5        | Drawbar pull, laden                                              | N                                           | 95000                  | 86000                  | 82000            | 78000                  | 96000/-               | 88000/-               | 97000/-               | 87000/-               | 80000/-               | 88000/-               |
|                        | 5.7        | Gradeability, laden                                              | %                                           | 55                     | 45                     | 42               | 41                     | 68/-                  | 60/-                  | 41/-                  | 59/-                  | 52/-                  | 36/-                  |
| Combustion-<br>engine  | 5.10       | Service brake                                                    |                                             | Wet brake              | Wet brake              | Wet brake        | Wet brake              | Wet brake             | Wet brake             | Wet brake             | Wet brake             | Wet brake             | Wet brake             |
|                        |            | Parking brake                                                    |                                             | Mechanical             | Mechanical             | Mechanical       | Mechanical             | Mechanical            | Mechanical            | Mechanical            | Mechanical            | Mechanical            | Mechanical            |
|                        | 7.1        | Engine manufacturer/type                                         |                                             | QSF3.8t3TC115          | DEUTZ TCD 3.6 L4       | QSF3.8t3TC115    | DEUTZ TCD 3.6 L4       | CUMMINS F 3.8         | CUMMINS F 3.8         | CUMMINS F 3.8         | CUMMINS QSF3.8t3TC115 | CUMMINS QSF3.8t3TC115 | CUMMINS QSF3.8t3TC115 |
|                        |            | Emission STD                                                     |                                             | EURO IIIA/GB3          | EU stageV/ EPA Tier 4F | EURO IIIA/GB3    | EU stageV/ EPA Tier 4F | EU stageV/EPA Tier 4F | EU stageV/EPA Tier 4F | EU stageV/EPA Tier 4F | EURO IIIA/GB3         | EURO IIIA/GB3         | EURO IIIA/GB3         |
|                        | 7.2        | Engine power according to DIN ISO 1585                           | kw/r/min                                    | 86/2200                | 55.4/2300              | 86/2200          | 55.4/2300              | 90/2200               | 90/2200               | 90/2200               | 86/2200               | 86/2200               | 86/2200               |
|                        | 7.3        | Max. torque                                                      | N·m/r/min                                   | 470/1100-1700          | 405/1300               | 470/1100-1700    | 405/1300               | 500/1500              | 500/1500              | 500/1500              | 470/1100-1700         | 470/1100-1700         | 470/1100-1700         |
| Addition<br>data       | 7.4        | Number of cylinders/displacement                                 | (-)/(cm³)                                   | 4/3759                 | 4/3620                 | 4/3759           | 4/3620                 | 4/3759                | 4/3759                | 4/3759                | 4/3759                | 4/3759                | 4/3759                |
|                        | 7.10       | Battery voltage/nominal capacity                                 | V/Ah                                        | 2-12/90                | 2-12/90                | 2-12/90          | 2-12/90                | 2-12/90               | 2-12/90               | 2-12/90               | 2-12/90               | 2-12/90               | 2-12/90               |
| Addition<br>data       | 10.3       | Hydraulic Tank - capacity (drain & refill)                       | liter                                       | 115                    | 115                    | 115              | 115                    | 115                   | 115                   | 160                   | 115                   | 115                   | 160                   |
|                        | 10.4       | Fuel tank capacity                                               | liter                                       | 120                    | 120                    | 120              | 120                    | 120                   | 120                   | 150                   | 120                   | 120                   | 150                   |

Note \*: Truck can enter container by replacing small tyres.

