



HANGCHA FORKLIFT CANADA INC.

Company address:
100-3801 F.-X.-Tessier,
Vaudreuil-Dorion, QC J7V 5V5

Tel: 877-319-4232
info@hcforkliftcanada.com
www.hcforkliftcanada.com



HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



X Series Lithium-ion Narrow Aisle Pantograph Reach Truck

with capacity of 3,000 to 4,500lbs

Making Material Handling Easier
SINCE 1956



EFFICIENT TRUCKS



The 3,000-4,500lb lithium-ion pantograph reach trucks are suitable for operations in narrow aisles and limited spaces. These trucks feature a high lift, large load capacity, pantograph, and a small turning radius. Using their advanced performance and technology, the reach trucks add to the efficiency of operations while maintaining reliability and a high level of safety. The X Series Lithium-ion Narrow Aisle Pantograph Reach Truck is the ideal tool for material handling in warehouses, supermarkets, and workshops.

Appearance

The X Series Lithium-ion Narrow Aisle Pantograph Reach Truck is designed to stack and retrieve goods efficiently in narrow warehouses and at high lift heights while still maintaining a lifting capacity of up to 4,500lbs. The exterior of this forklift is powder coated in a durable, easy to see, green finish that designates it as a lithium-ion model.

Stability


- The battery placed at the bottom of the chassis to create a low center of gravity. This allows the truck to have good stability.
- The four-pivot structure provides stability when the truck is being used to perform a high lift.




Load Capacity



Reliable & Safe




103.2"
Aisle Width



421"
Max. Lift Height

Highly Efficient

- The truck can operate in narrow aisles thanks to its small turning radius.
- Both a high-power pump motor and a silent gear pump (CONCENTRIC) are used to improve the lifting speed, lowering speed, and operating efficiency.
- With several power modes, the truck is able to adapt to different operating conditions.
- The regenerative braking system provides an increase in the truck's operating time.

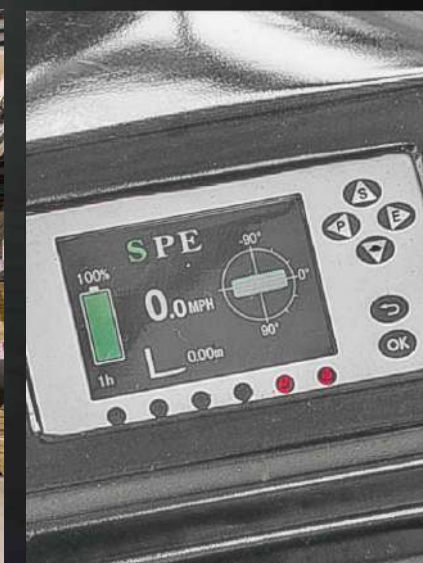



Comfort

The hanging pedal alleviates operator fatigue when driving for a long period of time by being placed in a comfortable position for the operator.



The operator is able to get on and off the truck more comfortably thanks to the low step-on height of the reach truck's operator compartment.




The handle, backrest, instruments, and switches were designed with ergonomics in mind to make operations more comfortable and flexible.



The lifting system is optimized for the operator to have an excellent line of sight through the mast.



The lateral removal of the battery provides easier maintenance and allows for the battery to be swapped out when running in continuous operating conditions.

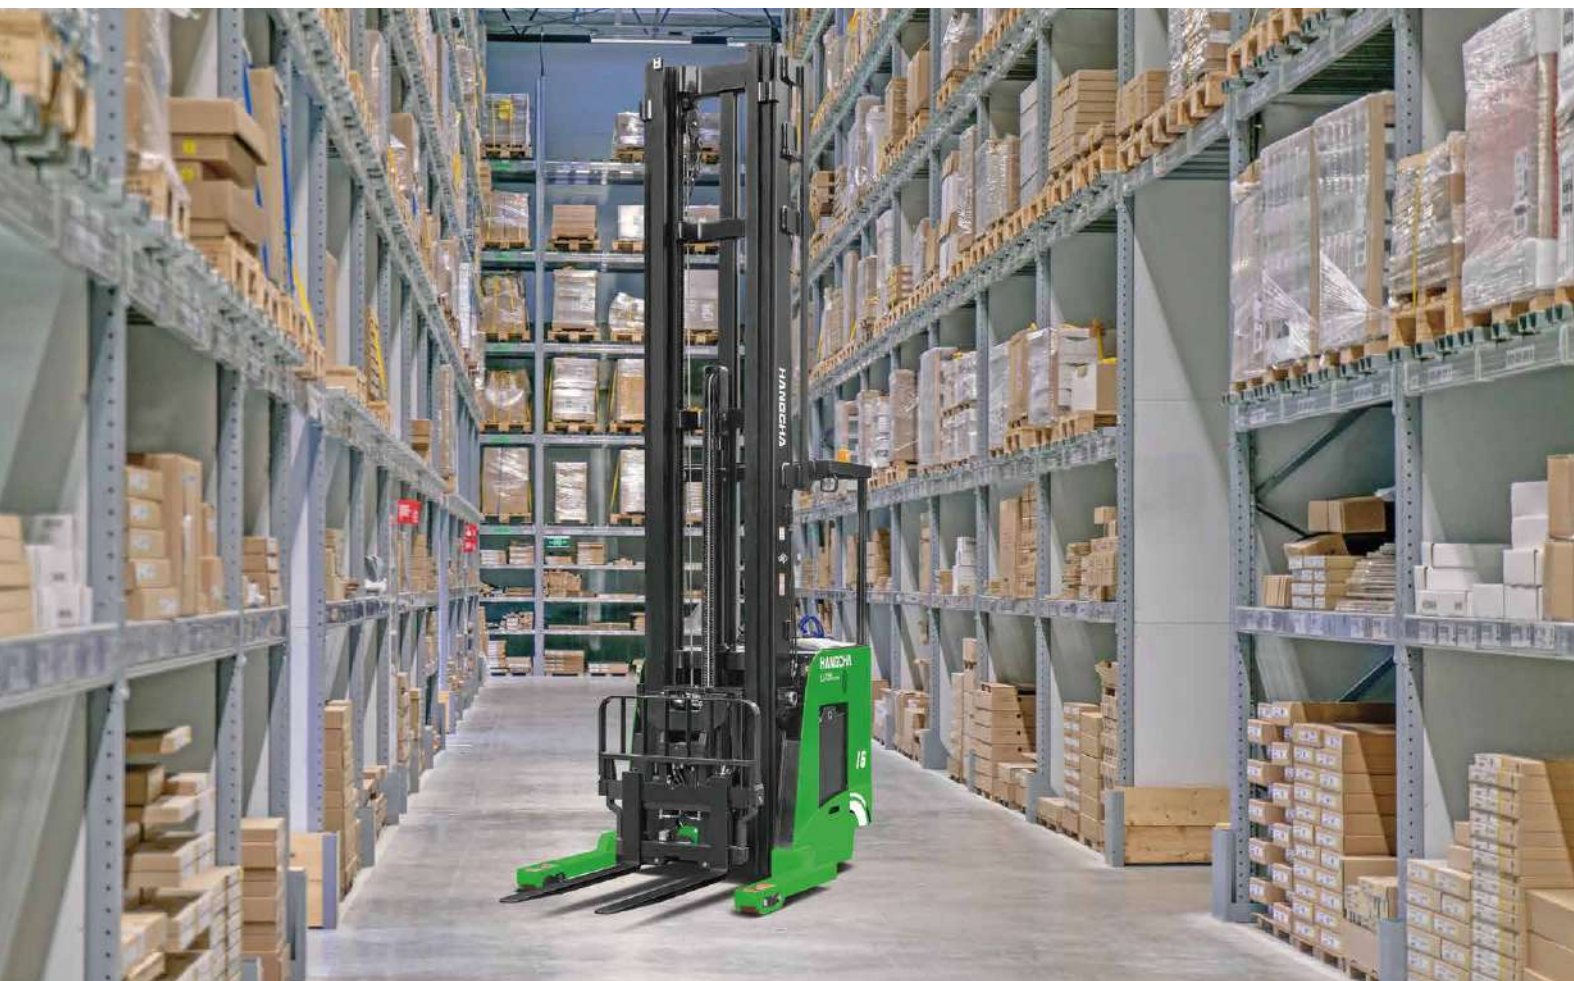


Reliability and Safety

- The four-pivot structure, low center of gravity, and high strength of the main frame components are designed to withstand the maximum load capacity of the reach truck.
- The controller, connectors, battery plug, and cut-off switch are all parts from industry known suppliers to ensure reliability, performance, and ease of service.
- The ZF transmission, SCHABMULLER drive motor, and the efficient AC power system greatly improve the reliability and service life of the narrow aisle reach truck.
- The controller manipulates the truck's steering angle, lifting height, and traveling speed in unison to provide safer operations.



The newly designed, multi-function joystick has a unique shape and angled design helps to minimize hand movement and muscle fatigue.

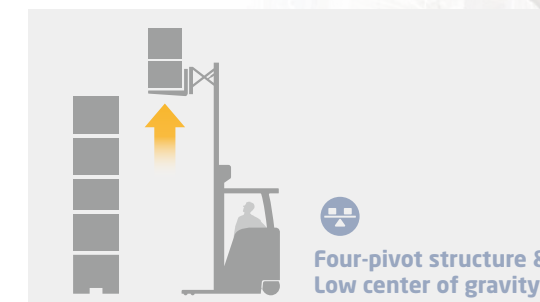

With the pedal sensing system, the truck can be driven only if the driver stands on the pedal. If the operator takes their foot off the pedal, active braking is initiated to prevent an accident.



The Full Free Lift 3 Stage Mast provides great visibility for the operator and improves operations safety.



Maintenance

- The brushless AC motor is maintenance-free and significantly reduces the total cost of ownership.
- The maintenance hatch opens wide enough to enable easy repair, maintenance, and tuning of the equipment.
- The battery is maintenance-free meaning that the battery does not need to be watered or checked.
- The controller and electrical components are placed together in the chassis and are highly integrated.





The large-screen LCD display with fault self-diagnosis functions can accurately display information in harsh environments.



Lithium Iron Phosphate Battery Packs

- Integrated Battery Management System (BMS) continually monitors energy management and ensures reliable operation.
- HANGCHA provides these Lithium Iron Phosphate (LiFePO₄) battery packs with up to a 7 year or 15,000 hour warranty.
- See warranty certificate for specific warranty information on the Lithium Iron Phosphate battery packs.

Battery Capacity	Standard	Optional
Battery Capacity (V/Ah) (kW·h)	36V/608Ah 21.88kW·h	36V/840Ah 30.24kW·h

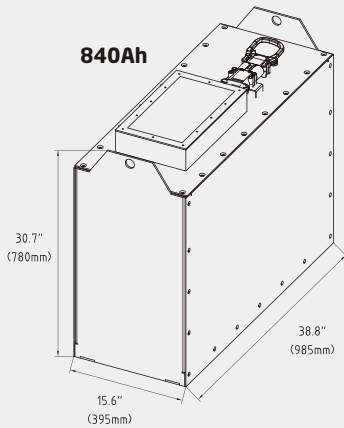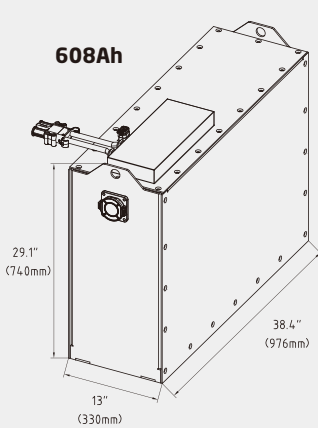

Standard Charger (48V/200Ah)



Advancement

- The electronic parking brake greatly improves the safety of the operator and the truck.
- The fast lifting and lowering speeds are highly efficient.
- The suspension system and hanging pedals improve operator comfort.
- The integrated mechanical, electrical, and hydraulic controls work in unison to regulate the speed of the truck when traveling and to move the forks more precisely and stably.
- The newly equipped AC control system supports longer working times by precisely managing and adjusting the performance of the truck.



High Efficiency

Standard Specification

- / AC Motor and Controller

/ Multi-Function Instrument Cluster

/ Electric Power Steering System

/ 198" (5.03m) Full Free-Lift Stage 3 Mast

/ Tilting Fork

/ Load Backrest

/ Overhead Guard

/ Soft Landing System
- / Safe Operating System

/ Automatically Decelerates when Cornering

/ Speed Automatic Limit when Mast High Lifting

/ Damper Pedal

/ Adjustable Backrest and Armrest

/ Battery Side Roll Out

/ Multi-Task Control Handle

/ Electro-Hydraulic Proportional Valve System
- / Polyurethane Tire

/ Headlights

/ Clipboard

/ Emergency Cut-Off Switch

/ Electric Horn

/ Static Strap

/ Electric Parking Brake

/ Strobe Light

Options

- / Charger

/ Larger Capacity Battery Pack

/ Other Dimensions of Forks

/ Mast Shield

/ Widened or Heightened Load Backrest
- / Sideshifter

/ Blue Light

/ Rear Working Light

/ Cabin Ceiling Light

/ Overhead Fan
- / Camera System

/ 12V Power Plug

/ Freezer

/ Fire Extinguisher

Mast Specification

	Lift	Height, Mast Lowered	Height, Mast Extended		Free Lift	Load Capacity at 24in/600mm			
			With Backrest	Without Backrest		SR14Li	SR16Li	SR18Li	SR20Li
	in(mm)	in(mm)	in(mm)	in(mm)	in(mm)	lb/kg	lb/kg	lb/kg	lb/kg
Full Free Lift 3 Stage Mast	198(5030)	92(2340)	239(6063)	239(6063)	50(1267)	3000(1361)	3500(1588)	4000(1814)	4500(2041)
	210(5330)	98(2490)	251(6363)	251(6363)	56(1417)	3000(1361)	3500(1588)	4000(1814)	4500(2041)
	240(6100)	107(2720)	281(7133)	281(7133)	65(1647)	3000(1361)	3500(1588)	4000(1814)	4000(1814)
	270(6860)	119(3025)	311(7893)	311(7893)	77(1952)	3000(1361)	3500(1588)	3500(1588)	3500(1588)
	299(7600)	133(3380)	340(8633)	340(8633)	91(2307)	3000(1361)	3000(1361)	3000(1361)	3000(1361)

With an integral sideshifter, subtract 220lb(100kg).

Mast Specification (HEAVY DUTY)

	Lift	Height, Mast Lowered	Height, Mast Extended		Free Lift	Load Capacity at 24in/600mm			
			With Backrest	Without Backrest		SR14Li	SR16Li	SR18Li	SR20Li
	in(mm)	in(mm)	in(mm)	in(mm)	in(mm)	lb/kg	lb/kg	lb/kg	lb/kg
Full Free Lift 3 Stage Mast	270(6860)	119(3025)	311(7893)	311(7893)	77(1952)	3000(1361)	3500(1588)	4000(1814)	4500(2041)
	299(7600)	133(3380)	340(8633)	340(8633)	91(2307)	3000(1361)	3500(1588)	3835(1750)	4000(1814)
	321(8150)	140(3560)	362(9183)	362(9183)	98(2487)	3000(1361)	3500(1588)	3748(1700)	3835(1750)
	341(8660)	149(3785)	382(9693)	382(9693)	107(2712)	3000(1361)	3500(1588)	3527(1600)	3638(1650)
	366(9300)	160(4060)	407(10333)	407(10333)	118(2987)	3000(1361)	3307(1500)	3307(1500)	3417(1550)
	400(10160)	172(4365)	441(11193)	441(11193)	130(3292)	3000(1361)	3086(1400)	3086(1400)	3197(1450)
	421(10700)	179(4545)	462(11733)	462(11733)	137(3472)	2866(1300)	2866(1300)	2866(1300)	2976(1350)
	453(11500)	192.5(4890)	493.5(12533)	493.5(12533)	150(3817)	2425(1100)	2425(1100)	2425(1100)	2535(1150)

With an integral sideshifter, subtract 220lb(100kg).

X Series Lithium-ion Narrow Aisle Pantograph Single Reach Truck



Distinguishing Parts	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.			
		HCFA Model		SR14Li	SR16Li	SR18Li	SR20Li
	1.2	Manufacturer's Type Designation		CQD14-XD3-JI CQD14-XD3-JIF2	CQD16-XD3-JI CQD16-XD3-JIF2	CQD18-XD3-JI CQD18-XD3-JIF2	CQD20-XD3-JI CQD20-XD3-JIF2
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Electric			
	1.4	Operator Type: hand, pedestrian, standing, seated, order-picker		Stand up			
	1.5	Rated Capacity/Rated Load	Q (lb/kg)	300 0 (1361)	3500 (1588)	4000 (1814)	4500 (2041)
	1.6	Load Centre Distance	c (in/mm)	24 (600)			
	1.8	Load Distance, centre of drive axle to fork	x (in/mm)	10.8 (274)			
	1.9	Wheelbase	y (in/mm)	See See Table 1			
Weight	2.1	Service Weight, without battery	lb (kg)	6725(3050)			7253 (3290)
	2.2	Axle Loading, laden front/rear with assemble retracted	lb (kg)	6737(3056)/3580(1624) ¹⁾	7026(3187)/3732(1693) ¹⁾	7313(3317)/3887(1763) ¹⁾	7948(3605)/4222(1915) ¹⁾
	2.3	Axle Loading, unladen front/rear with assemble retracted	lb (kg)	2826(1282)/4405(1998) ¹⁾			3034(1376)/4727(2144) ¹⁾
Tires & Chassis	3.1	Tires: solid rubber, superelastic, pneumatic, polyurethane		Polyurethane			
	3.2	Wheels Size, load	in(mm)	5×3.9(Ø127×99)			
	3.3	Wheels Size, drive	in(mm)	13.5×5.3(Ø343×135)			
	3.4	Wheels Size, caster	in(mm)	7.9×2.2(Ø200×56)			
Dimensions	4.1	Tilt of Mast/Fork Carriage Forward/Backward	α/β (°)	3/4			
	4.2	Height, mast lowered	h ₁ (in/mm)	92(2340)			
	4.3	Free Lift	h ₂ (in/mm)	50(1267)			
	4.4	Lift	h ₃ (in/mm)	198(5030)			
	4.5	Height, mast extended	h ₄ (in/mm)	239(6063)			
	4.7	Height of Overhead Guard	h ₆ (in/mm)	92.5(2350)			
	4.8	Stand Height	h ₇ (in/mm)	9.5(240)			
	4.10	Height of Wheel Arms	h ₈ (in/mm)	5.1(130)			
	4.19	Overall Length	l ₁ (in/mm)	See Table 1			
	4.20	Length to Face of Forks	l ₂ (in/mm)	See Table 1			
	4.21	Overall Width	b ₁ (in/mm)	42.5(1080)			
	4.22	Fork Dimensions, Std.	s/e/l (in/mm)	1.6/4.8/42(40/122/1070)			
		Fork Dimensions, Opt.	s/e/l (in/mm)	1.8/4.8/l(45/122/l),L>1500			
	4.24	Fork-Carriage Width	b ₂ (in/mm)	37(942)			
	4.25	Distance between Fork-Arms	b ₃ (in/mm)	7.9-29.9(200-760)			
	4.26	Distance Between Wheel Arms/Loading Surfaces	b ₄ (in/mm)	46(1170) [Optional: 34-50(864-1270)(1" increments)] ²⁾			
		Outer Distance Between Wheel Arms	b ₂ (in/mm)	56.7(1442) [Optional: b ₄ +10.7(272)]			
	4.28	Reach Distance	l ₄ (in/mm)	24(610)			
	4.31	Ground Clearance, laden, below mast	m ₁ (in/mm)	2(50)			
	4.32	Ground Clearance, centre of wheelbase	m ₂ (in/mm)	2(50)			
	4.34	Aisle Width for Pallets (clearance 7.9")	Ast (in/mm)	See Table 1			
	4.35	Turning Radius	Wa (in/mm)	See Table 1			
Performance Data	5.1	Travel Speed, laden/unladen	mph km/h	6.5/7.5 10.5/12			
	5.2	Lift Speed, laden/unladen	fpm mm/s	78/105 395/535	72/105 365/535	68/105 345/535	65/105 330/535
	5.3	Lowering Speed, laden/unladen	fpm mm/s	105/105 535/535			
	5.4	Reach Speed, laden/unladen	fpm mm/s	31/35 160/180			
	5.7	Gradeability, laden/unladen	%	10/12			
		Parking Brake		Electromagnetic			
Electric Motor	6.1	Drive Motor Rating at S2 60 min	hp/kW	8.6(6.4)			
	6.2	Lift Motor Rating at S3 15%	hp/kW	17.4(13)			
	6.4	Battery Voltage, nominal capacity	V/Ah	38.6/608			
		Battery Voltage, nominal capacity	V/Ah	38.6/840			
	6.5	Max. Battery Weight	lb (kg)	See Table 1			
		Min. Battery Weight	lb (kg)	See Table 1			
Additional Data		Battery Compartment Size, l/b/h	in(mm)	See Table 1			
	10.7	Sound Pressure Level at the Driver's Seat	dB (A)	62			

Note: 1) With min. battery 2) The inner value, b4, is a fixed value and cannot be adjusted.
✱ F2: Means the cold storage truck model F2 are suitable for use in cold storage environments down to -30 °C.


Table 1

Battery and Compartment Size			16.5"	18.5"
6.4	Battery Voltage	V	38.6	38.6
	Battery Capacity Maximum 5 Hr Rate	Ah	608	840
	Battery Compartment	"X" Max.	in(mm) 38.4(976)	38.8(985)
		"Y" Max.	in(mm) 13(330)	15.55(395)
		"Z" Max.	in(mm) 29.1(740)	30.7(780)
6.5	Minimum Battery Weight	lb(kg)	573(260)	683(310)
	Maximum Battery Weight	lb(kg)	661(300)	727.5(330)
1.9	Wheelbase	y (in/mm)	57.8(1469)	59.8(1519)
4.19	Overall Length	l1 (in/mm)	74.7(1898)	76.7(1948)
4.20	Length to Face of Forks	l2 (in/mm)	57(1450) ②	59(1500) ②
4.35	Turning Radius	Wa (in/mm)	67.8(1722)	69.8(1772)
4.34	Ast 40"L(1026mm)×48"W(1220mm) Clearance 7.9"	Ast in(mm)	105.24(2673) ②	107.24(2724) ②
	Ast 48"L(1220mm)×40"W(1026mm) Clearance 7.9"	Ast in(mm)	112.87(2867) ②	114.88(2918) ②
	Ast 48"L(1220mm)×32"W(813mm) Clearance 7.9"	Ast in(mm)	112.87(2867) ②	114.88(2918) ②



Note: ②Add 1"(50mm) with sideshift

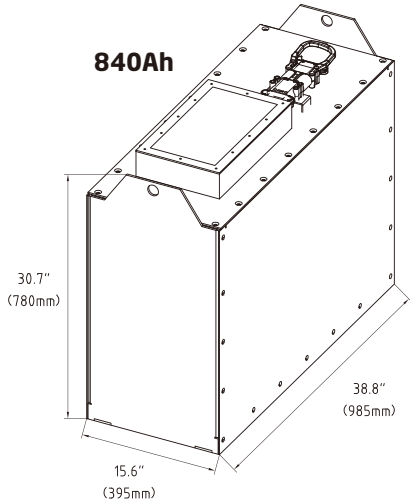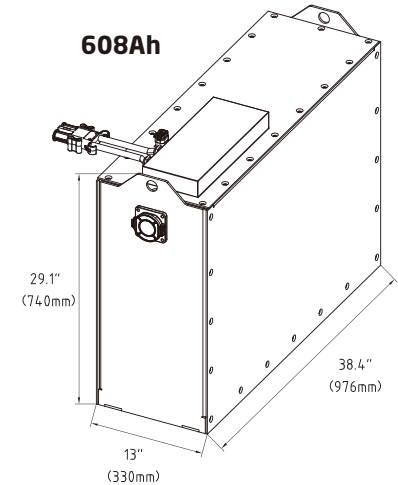

RATED CAPACITY AND LOAD DIAGRAM

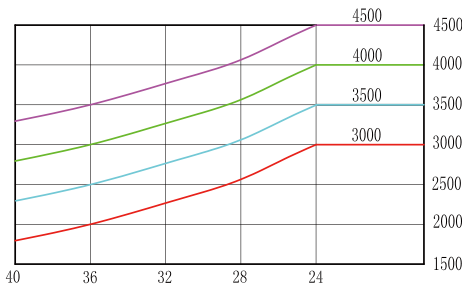

LOAD CENTER DISTANCE (in)

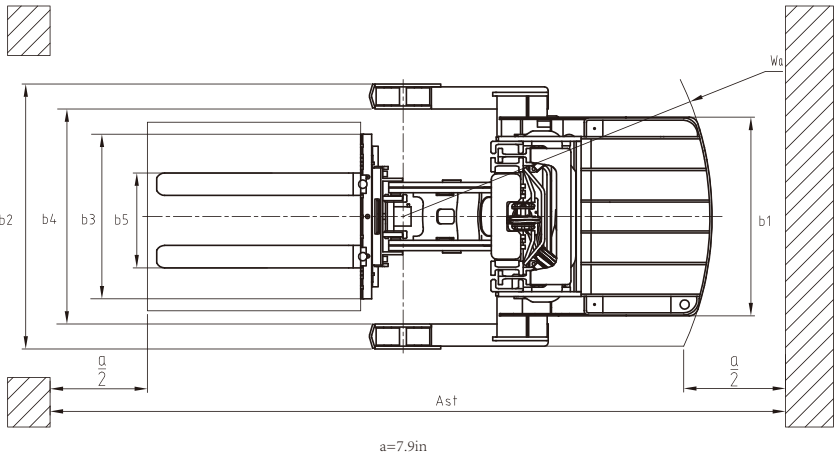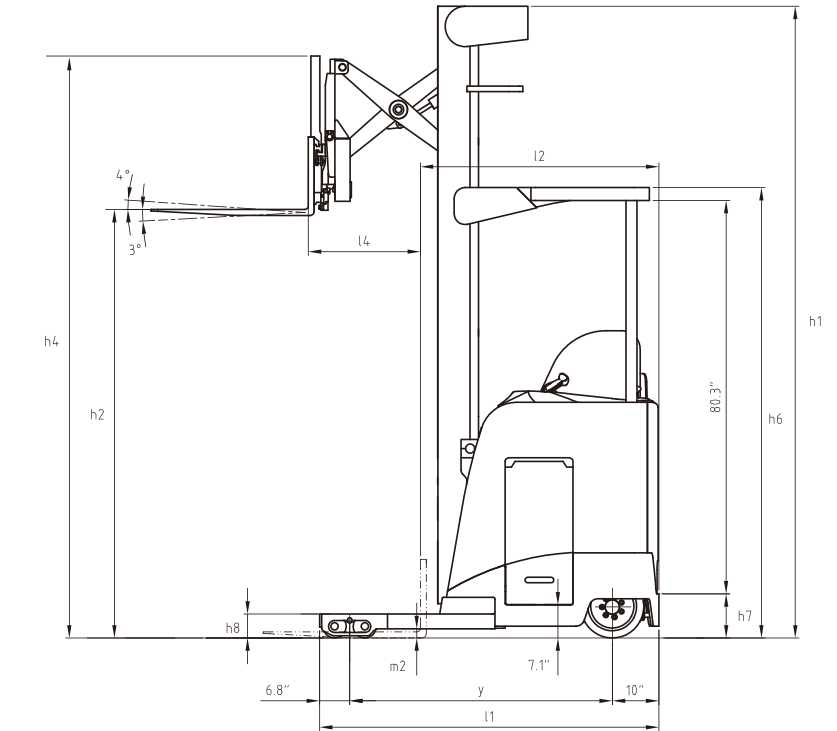

X Series Lithium-ion Narrow Aisle Pantograph Double Reach Truck

Distinguishing Marks	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.	
		HCFA Model		DR14Li	DR16Li
	1.2	Manufacturer's Type Designation		CQD14-XD3-JDI CQD14-XD3-JDIF2	CQD16-XD3-JDI CQD16-XD3-JDIF2
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Electric	Electric
	1.4	Operator Type: hand, pedestrian, standing, seated, order-picker		Standing	Standing
	1.5	Rated Capacity/Rated Load	Q (lb/kg)	3000(1361)	3500(1588)
	1.6	Load Centre Distance	c (in/mm)	24(600)	24(600)
Weight	1.8	Load Distance, centre of drive axle to fork	x (in/mm)	14.2(360)	14.2(360)
	1.9	Wheelbase	y (in/mm)	See Table 2	See Table 2
	2.1	Service Weight, without battery	lb (kg)	7067(3205)	7363.5(3340)
	2.2	Axle Loading, laden front/rear with assemble retracted	lb (kg)	6590(2989)/4004(1816) ¹⁾	7374(3345)/4023(1825) ¹⁾
	2.3	Axle Loading, unladen front/rear with assemble retracted	lb (kg)	2943(1335)/4564(2070) ¹⁾	3102(1407)/4769(2163) ¹⁾
	3.1	Tires: solid rubber, superelastic, pneumatic, polyurethane		Polyurethane	Polyurethane
	3.2	Wheels Size, load	in(mm)	5×3.9(Ø127×99)	5×3.9(Ø127×99)
Tires & Chassis	3.3	Wheels Size, drive	in(mm)	13.5×5.3(Ø343×135)	13.5×5.3(Ø343×135)
	3.4	Wheels Size, caster	in(mm)	7.9×2.2(Ø200×56)	7.9×2.2(Ø200×56)
	4.1	Tilt of Mast/Fork Carriage Forward/Backward	α/β (°)	3/4	3/4
Dimensions	4.2	Height, mast lowered	h ₁ (in/mm)	92(2340)	92(2340)
	4.3	Free Lift	h ₂ (in/mm)	50(1267)	50(1267)
	4.4	Lift	h ₃ (in/mm)	198(5030)	198(5030)
	4.5	Height, mast extended	h ₄ (in/mm)	239(6063)	239(6063)
	4.7	Height of Overhead Guard	h ₅ (in/mm)	92.5(2350)	92.5(2350)
	4.8	Stand Height	h ₇ (in/mm)	9.5(240)	9.5(240)
	4.10	Height of Wheel Arms	h ₈ (in/mm)	5.1(130)	5.1(130)
	4.19	Overall Length	l ₁ (in/mm)	See Table 2	See Table 2
	4.20	Length to Face of Forks	l ₂ (in/mm)	See Table 2	See Table 2
	4.21	Overall Width	b ₁ (in/mm)	42.5(1080)	42.5(1080)
	4.22	Fork Dimensions, Std.	s/e/ l (in/mm)	1.6×4.8×42(40×122×1070)	1.6×4.8×42(40×122×1070)
		Fork Dimensions, Opt.	s/e/ l (in/mm)	1.8×4.8×L(45×122×L),L>2000	1.8×4.8×L(45×122×L),L>2000
	4.24	Fork-Carriage Width	b ₂ (in/mm)	37(942)	37(942)
	4.25	Distance between Fork-Arms	b ₃ (in/mm)	7.9-29.9(200-760)	7.9-29.9(200-760)
	4.26	Distance Between Wheel Arms/Loading Surfaces	b ₄ (in/mm)	46(1170) [Optional: 34-50(864-1270)(1" increments)] ²⁾	46(1170) [Optional: 34-50(864-1270)(1" increments)] ²⁾
		Outer Distance Between Wheel Arms	b ₂ (in/mm)	56.7(1442) [Optional: b ₂ +10.7(272)]	56.7(1442) [Optional: b ₂ +10.7(272)]
	4.28	Reach Distance	l ₄ (in/mm)	42(1067)	42(1067)
	4.31	Ground Clearance, laden, below mast	m ₁ (in/mm)	2(50)	2(50)
	4.32	Ground Clearance, centre of wheelbase	m ₂ (in/mm)	2(50)	2(50)
	4.34	Aisle Width for Pallets (clearance 7.9")	Ast (in/mm)	See Table 2	See Table 2
	4.35	Turning Radius	Wa (in/mm)	See Table 2	See Table 2
Performance Data	5.1	Travel Speed, laden/unladen	mph km/h	6.5(10.5) 7.5(12)	6.5(10.5) 7.5(12)
	5.2	Lift Speed, laden/unladen	fpm mm/s	78/105 395/535	72/105 365/535
	5.3	Lowering Speed, laden/unladen	fpm mm/s	105/105 535/535	105/105 535/535
	5.4	Reach Speed, laden/unladen	fpm mm/s	31/35 160/180	31/35 160/180
	5.7	Gradeability, laden/unladen	%	10/12	10/12
		Parking Brake		Electromagnetic	Electromagnetic
		Drive Motor Rating at S2 60 min	hp/kW	8.6(6.4)	8.6(6.4)
Electric Motor	6.2	Lift Motor Rating at S3 15%	hp/kW	17.4(13)	17.4(13)
	6.4	Battery Voltage, nominal capacity	V/Ah	38.6/608	38.6/608
		Battery Voltage, nominal capacity	V/Ah	38.6/840	38.6/840
		Max. Battery Weight	lb (kg)	See Table 2	See Table 2
	6.5	Min. Battery Weight	lb (kg)	See Table 2	See Table 2
		Battery Compartment Size, l/b/h	in(mm)	See Table 2	See Table 2
Additional Data	10.7	Sound Pressure Level at the Driver's Seat	dB (A)	62	62

Note: 1) With min. battery 2) The inner value, b4, is a fixed value and cannot be adjusted.
* F2: Means the cold storage truck model F2 are suitable for use in cold storage environments down to -30 °C.

Mast Specification

Full Free Lift 3 Stage Mast	Lift	Height, Mast Lowered	Height, Mast Extended		Free Lift	Load Capacity at 24in/600mm	
			With Backrest	Without Backrest		DR14Li	DR16Li
	in(mm)	in(mm)	in(mm)	in(mm)	in(mm)	lb/kg	lb/kg
	198(5030)	92(2340)	239(6063)	235(5974)	50(1267)	3000(1361)	3500(1588)
	210(5330)	98(2490)	251(6363)	247(6274)	57(1417)	3000(1361)	3330(1510)
	240(6100)	107(2720)	281(7133)	277(7044)	65(1647)	2888(1310)	3000(1361)
	270(6860)	119(3025)	311(7893)	307(7804)	77(1952)	2490(1130)	2600(1180)
	299(7600)	133(3380)	340(8633)	336(8544)	91(2307)	2116(960)	2227(1010)

With an integral sideshifter, subtract 220lb(100kg).

Mast Specification (HEAVY DUTY)

Full Free Lift 3 Stage Mast	Lift	Height, Mast Lowered	Height, Mast Extended		Free Lift	Load Capacity at 24in/600mm	
			With Backrest	Without Backrest		DR14Li	DR16Li
	in(mm)	in(mm)	in(mm)	in(mm)	in(mm)	lb/kg	lb/kg
	270(6860)	119(3025)	311(7893)	307(7804)	77(1952)	3000(1361)	3500(1588)
	299(7600)	133(3380)	340(8633)	336(8544)	91(2307)	3000(1361)	3417(1550)
	321(8150)	140(3560)	362(9183)	358(9094)	98(2487)	3000(1361)	3307(1500)
	341(8660)	149(3785)	382(9693)	378(9604)	107(2712)	3000(1361)	3197(1450)
	366(9300)	160(4060)	407(10333)	403(10244)	118(2987)	2866(1300)	2976(1350)
	400(10160)	172(4365)	441(11193)	437(11104)	130(3292)	2646(1200)	2756(1250)
	421(10700)	179(4545)	462(11733)	458.5(11644)	137(3472)	2315(1050)	2425(1100)
	453(11500)	192.5(4890)	493.5(12533)	490(12444)	150(3817)	1874(850)	2028(920)

With an integral sideshifter, subtract 220lb(100kg).

Table 2

Battery and Compartment Size			16.5"		18.5"	
6.4	Battery Voltage	V	38.6		38.6	
	Battery Capacity Maximum 5 Hr Rate	Ah	608		840	
	Battery Compartment	"X" Max.	in(mm)	38.4(976)	38.8(985)	
		"Y" Max.	in(mm)	13(330)	15.55(395)	
		"Z" Max.	in(mm)	29.1(740)	30.7(780)	
6.5	Minimum Battery Weight	lb(kg)	573(260)		683(310)	
	Maximum Battery Weight	lb(kg)	661(300)		727.5(330)	
1.9	Wheelbase	y (in/mm)	62.8(1596)		64.8(1646)	
4.19	Overall Length	l1 (in/mm)	79.7(2025)		81.7(2075)	
4.20	Length to Face of Forks	l2 (in/mm)	64.6(1641) ②		66.6(1691) ②	
4.35	Turning Radius	Wa (in/mm)	72.8(1849)		74.8(1899)	
4.34		Ast 40"L(1026mm)×48"W(1220mm) Clearance 7.9"	Ast in(mm)	106.81(2713) ②	108.82(2764) ②	
		Ast 48"L(1220mm)×40"W(1026mm) Clearance 7.9"	Ast in(mm)	114.45(2907) ②	116.46(2958) ②	
		Ast 48"L(1220mm)×32"W(813mm) Clearance 7.9"	Ast in(mm)	114.45(2907) ②	116.46(2958) ②	

Note: ②Add 1" (50mm) with sideshift

RATED CAPACITY AND LOAD DIAGRAM

