



HANGCHA FORKLIFT CANADA INC.

Company address:
100-3801 F.-X.-Tessier,
Vaudreuil-Dorion, QC J7V 5V5

Tel: 877-319-4232
info@hcforkliftcanada.com
www.hcforkliftcanada.com



Hangcha
Official Website



Follow us on
LinkedIn



Follow us on
Facebook



Follow us on
YouTube



ISO45001:2018



ISO14001:2015



ISO9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

HANGCHA GROUP CO., LTD. reserves the right to make any changes
without notice concerning colors, equipment, or specifications detailed in
this brochure, or to discontinue individual models. The colors of trucks,
delivered may differ slightly from those in brochures.

2024 VERSION 2 / COPYRIGHT 2026 / 02

WS Series Electric Pedestrian Stacker

with capacity of 1,200kg and 1,500kg



CTD15-WS & CTD15-WS-I

CDD12-WS-I & CDD15-WS-I

CDD15-WSS

CDD12-WS & CDD15-WS

The World of Hangcha



WS Series

Electric Pedestrian Stacker



Variable Speed
Control



Intelligent
& Efficient



Rugged
& Durable



Easy
& Comfortable

CDD12-WS & CDD15-WS



Capacity:
1200/1500kg
Lift Height:
2000-4000mm
Fork size:
560/680 x 1150 mm
Battery:
24V 71Ah/89Ah (C5)

CDD12-WS-I & CDD15-WS-I



Capacity:
1200/1500kg
Lift Height:
2000-4000mm
Fork size:
560/680 x 1150mm
Li-Battery:
24V 60Ah/100Ah

CTD15-WS



Capacity:
1500kg
Lift Height:
2000-4000mm
Fork size:
560/680 x 1150mm
Battery:
24V 71Ah/89Ah (C5)

CTD15-WS-I



Capacity:
1500kg
Lift Height:
2000-4000mm
Fork size:
560/680 x 1150mm
Li-Battery:
24V 60Ah/100Ah

CDD15-WSS




Capacity:
1500kg
Lift Height:
2000-4000mm
Fork size:
560/680 x 1150mm
Battery:
24V 106Ah(24V 210Ah)


Variable Speed Control on Lifting & Lowering

- Comfortable and efficient thanks to Hangcha patented intelligent handle and control system, ideal for replacing manual & semi-electric stackers, for light use in narrow warehouse environments with efficient and easy pallet stacking.
- The proportional lowering brings high efficiency for exact pallet placement and more precise control when compared to the normal fixed speed of lifting & lowering.
- Variable speed control by proportional control knob, keeps lifting and lowering smooth, stable, safe and energy saving.

BEFORE




NEW

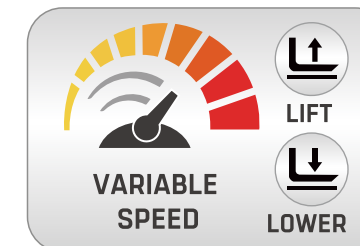

Precise Control

Proportional lifting & lowering

The variable speed control ensures the stacker goes up and down smoothly, minimizing the mechanical shock and vibration, ensuring fragile loads are gently placed on racking or the floor, and reducing the impact of noise and vibration on operators.



(FOR CDD12-WS & CDD12-WS-I)

High efficiency

The variable speed control brings accurate response for adjusting the lifting & lowering speed according to the actual situation, the operator can easily complete the task and improve the working efficiency.

Longer service life

Variable speed control can reduce the mechanical impact and friction during lifting & lowering, reduce the wear and tear on the chassis, mast, bearings, and enable a longer service life.

Lowering buffering

Automatic lowering speed descent with soft buffering when the fork height is lowered to around 10cm from the ground, effectively protects the safety of the cargo, low noise and small vibration.

Energy saving

Compared to the traditional fixed lifting & lowering speed, variable speed can be adjusted according to the load and height by operator, reducing energy waste and improving energy utilization rate.

Intelligent & Efficient

Hangcha patented multifunctional intelligent tiller handle is unique design for quick fault diagnosis, enabling an easier service, shorter service time and lowered labor costs.

Multifunctional intelligent tiller handle

- 1

 Emergency reverse switch
- 2

 Forward and backward control knob
- 3


 Horn
- 4

 Battery power
- 5

 Recharging Alert
- 6

 Lifting & Lowering
- 7

 Fault code display

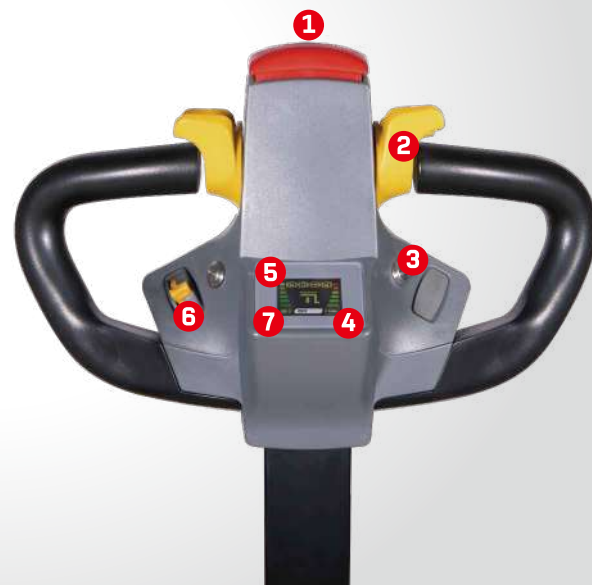


Easy Maintenance



Serial communication technology


Single wiring harness communication from tiller handle to controller system. Simple, Durable and Stable.

-  Low after-sales service cost
-  Quick & easy fault diagnosis
-  Everyone can be an expert

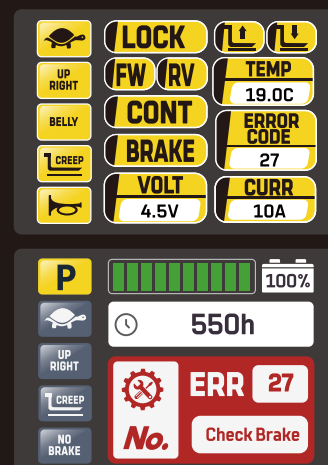

Operation status & fault diagnosis are integrated onto the tiller handle display for easy troubleshooting.

Operator Preferred

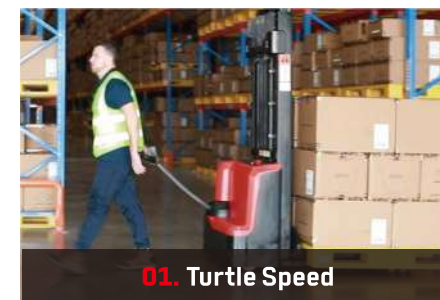


01. Turtle Speed

Enable operator to choose different speed modes based on their experience and the specific work environment.



02. Up-Right Drive

Easily maneuvered with the handle in the vertical position by pressing the turtle-speed button.

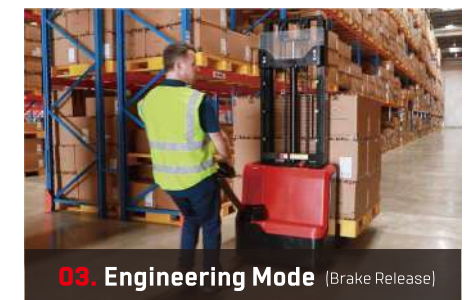

03. Engineering Mode (Brake Release)

When truck is down, release the brake to move the unit manually.

Rugged & Durable

Due to a high-strength frame and mast design and solid materials used, the deformation of the frame, mast, and forks is small.



Longer service life
Mast: Standard C+H channel steel
Frame: Steel plate thickness of 5mm
Frame bottom plate: 30mm integrated steel plate




Double-chain design
Compared with single-chain design, it has higher strength, safer and more stable.



Built-in charger
Hidden charging plug, high safety, the whole vehicle is powered off during charging, reducing safety hazards.

Small deformation of forks and masts, stable and durable
More stable when lifting & lowering with loads.

Standard equipped with cylinder explosion-proof valve
It can prevent accidents such as uncontrolled descent caused by unexpected rupture of oil pipes, ensuring stable descent of the load and personal safety, and preventing damage to equipment.

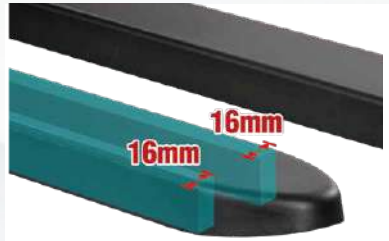

High-strength forks
16mm flat iron on both sides of fork. High strength and small deformation even under heavy loads.

The battery is fixed at the bottom of the frame
Improved stability.

Battery low voltage protection
Effectively avoid battery over-discharge, ensuring a longer battery life.

Adjustable balance wheel
Improved stability and maneuverability, suitable for different working scenarios.

High lateral and longitudinal stability
Wider wheelbase and longer axle distance.

**FULL
COVERAGE
PROTECTION
ON MAST**



Safe operation

Emergency reverse switch
In case of an emergency, it protects the operator and the surrounding personnel from harm.

Safety travel speed limit
When the fork is lifted to above 500mm, the driving speed automatically reduces to 2km/h to ensure the safety of operating at a high position in case of any misoperation.

*The low ground clearance of **30mm** helps to reduce the risk of foot injuries*

Easy & Comfortable



Effortless, easy to operate

Low-mounted longer tiller reduces steering force required.

Low mast static height

Easy to operate in containers and elevators with less than 3.3m lifting height.



Easy to recharge

Built-in charger and an external charging cable storage box for convenient charging.



The steering angle is designed to be above 180 degrees

Small turning radius.

Excellent maneuverability

Precise and maneuverable operating, high safety and efficiency.


Adjustment of support legs and forks

CTD15-WS support legs are fixed with three screws per side outside the truck's body, allowing for easy adjustment to achieve widths of 1150mm, 1290mm, and 1430mm. Forged forks with adjustable widths from 200mm to 800mm, ensure durability and versatility. The truck includes a standard load backrest (LBR) for enhanced safety during material handling.

Optional Configuration

- **Reversing buzzer**
- **24V/100Ah Li-ion**
- **Free Lift**
Only CDD12-WS and CDD12-WS-I are available; Suitable for heights of 2.5M and above only
- **Intelligent control**
- **24V/89Ah Lead-acid**

Unique in the market and very suitable for sorting operations on trucks. With a dedicated remote control device, the operator can control the forks to lift to the appropriate working height and carry out sorting operations, thus avoiding the need to use the handle buttons and bend over to pick up goods, improving operational efficiency and comfort.

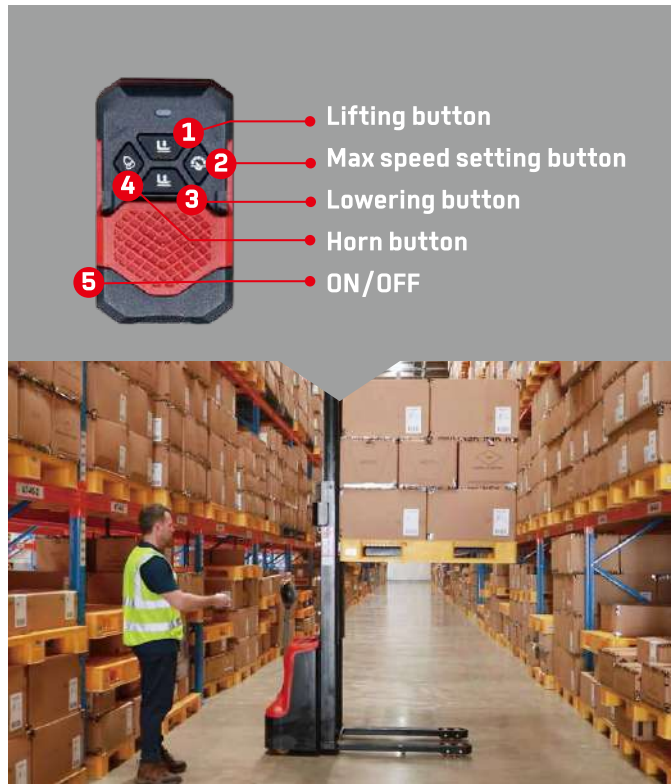

With the remote control device, you can easily set the speed suitable for the work, from level 1 speed to level 5 speed. Such speed transitions allow you to move the truck with controlled operation at ease.



WS Electric Pedestrian Stacker Specification


Distinguishing mark	1.1	Manufacturer			HANGCHA GROUP CO.,LTD.			
	1.2	Manufacturer's type designation			CDD15-WS	CDD15-WS-I	CDD12-WS	CDD12-WS-I
	1.3	Drive			Battery		Battery	
	1.4	Operator type			Pedestrian		Pedestrian	
	1.5	Load capacity/rated load	Q	kg	1500		1200	
	1.6	Load centre distance	c	mm	600		600	
	1.8	Load distance, centre of drive axle to fork	x	mm	800		800	
	1.9	Wheelbase	y	mm	1210		1210	
	1.9	Wheelbase	y	mm	1210		1210	
Weight	2.1	Service weight (without battery) [560 Fork size]		kg	529.4	529.4	528	528
	2.2	Service weight (with 71Ah battery or 60Ah Li-battery)		kg	576.2	543.4	574.8	542
	2.3	Service weight (with 89Ah battery)		kg	581	/	579.6	/
	2.4	Axle loading, laden front/rear		kg	608.8/1420.6	613/1430.4	518.4/1209.6	522.6/1219.4
	2.5	Axle loading, unladen front/rear		kg	432.2/144	407.4/136	431/143.8	406.5/135.5
Tyres, chassis	3.1	Wheels			Polyurethane		Polyurethane	
	3.2	Wheel size, front	Ø x width	mm	Ø210x70		Ø210x70	
	3.3	Wheel size, rear	Ø x width	mm	Ø80X70		Ø80X70	
	3.4	Additional wheels (dimensions)	Ø x width	mm	Ø115X55		Ø115X55	
	3.5	Wheels, number front/rear [x = driven wheels]			1x + 1 / 4		1x + 1 / 4	
	3.6	Tread, front	b10	mm	550		550	
	3.7	Tread, rear	b11	mm	390[560 fork width]/525[680 fork width]		390[560 fork width]/525[680 fork width]	
Dimensions	4.2	Lowered mast height	h1	mm	1730		1730	
	4.4	Lift height	h3	mm	2500		2500	
	4.5	Extended mast height	h4	mm	2935		2935	
	4.9	Height of tiller in driving position, min./max.	h14	mm	910/1270		910/1270	
	4.15	Height, lowered	h13	mm	85±2		85±2	
	4.19	Overall length	l1	mm	1730[1150 fork length]/1800[1220 fork length]		1730[1150 fork length]/1800[1220 fork length]	
	4.20	Length to face of forks	l2	mm	560		560	
	4.21	Overall width	b1	mm	820		820	
	4.22	Fork dimensions	s/e/l	mm	70x160x1150[1220]		70x160x1150[1220]	
	4.25	Width over forks	b5	mm	560/680		560/680	
	4.32	Ground clearance, centre of wheelbase	m2	mm	30		30	
	4.34.1	Aisle width for pallets 1000 x 1200 crossways	Ast	mm	2268		2268	
	4.34.2	Aisle width for pallets 800 x 1200 lengthways	Ast	mm	2194		2194	
	4.35	Turning radius	Wa	mm	1425		1425	
Performance data	5.1	Travel speed, with/without load		km/h	4/4.5		4/4.5	
	5.2	Lift speed, with/without load		mm/s	0-102/0-190		0-123/0-230	
	5.3	Lowering speed, with/without load		mm/s	30-135/20-200		28-164/26-278	
	5.8	Max. gradeability, with/without load		%	5/10		5/10	
	5.10	Service brake			Electromagnetic		Electromagnetic	
Electric-engine	6.1	Drive motor rating S2 60 min		kW	0.75		0.75	
	6.2	Lift motor rating at S3 15%		kW	2.5		2.5	
	6.4	Battery voltage/nominal capacity [K5]	V/Ah		● 12/71x2 ○ [12/89]x2 ● 24V/60Ah ○ 24V/100Ah	● 12/71x2 ○ [12/89]x2 ● 24V/60Ah ○ 24V/100Ah	● 24V/60Ah ○ 24V/100Ah	
	6.5	Battery weight +/- 5%	kg		● 23.4 x 2[71Ah] ○ 25.8 x 2[89Ah] ● 17[60Ah] ○ 24[100Ah]	● 23.4 x 2[71Ah] ○ 25.8 x 2[89Ah] ● 17[60Ah] ○ 24[100Ah]	● 17[60Ah] ○ 24[100Ah]	
	6.6	Charger	A		10	30	10	30
Addition Data	8.1	Type of drive control			DC speed control		DC speed control	
	8.4	Sound level at the driver's ear according to EN 12053		dB(A)	<75		<75	

Note: 1kgs=2.2lbs, 25.4mm=1inch
● standard ○ option


Mast Dimensions

Mast types	Lift height h3(mm)	Lowered mast height h1(mm)	Free lift height h2(mm)	Extended mast height h4(mm)
Duplex Mast	2000	1480	/	2435
	2500	1730	/	2935
	3000	1980	/	3435
	3300	2130	/	3735
	3500	2230	/	3935
	4000	2550	/	4370
2-Free Mast	2500	1710	1300	2917
	3000	1960	1550	3417
	3300	2110	1700	3717
	3500	2210	1800	3917

2-Free Mast: Only CDD12-WS and CDD12-WS-I are available; Suitable for heights of 2.5M and above only
4M Lift height : Only CDD15-WS and CDD15-WS-I are available

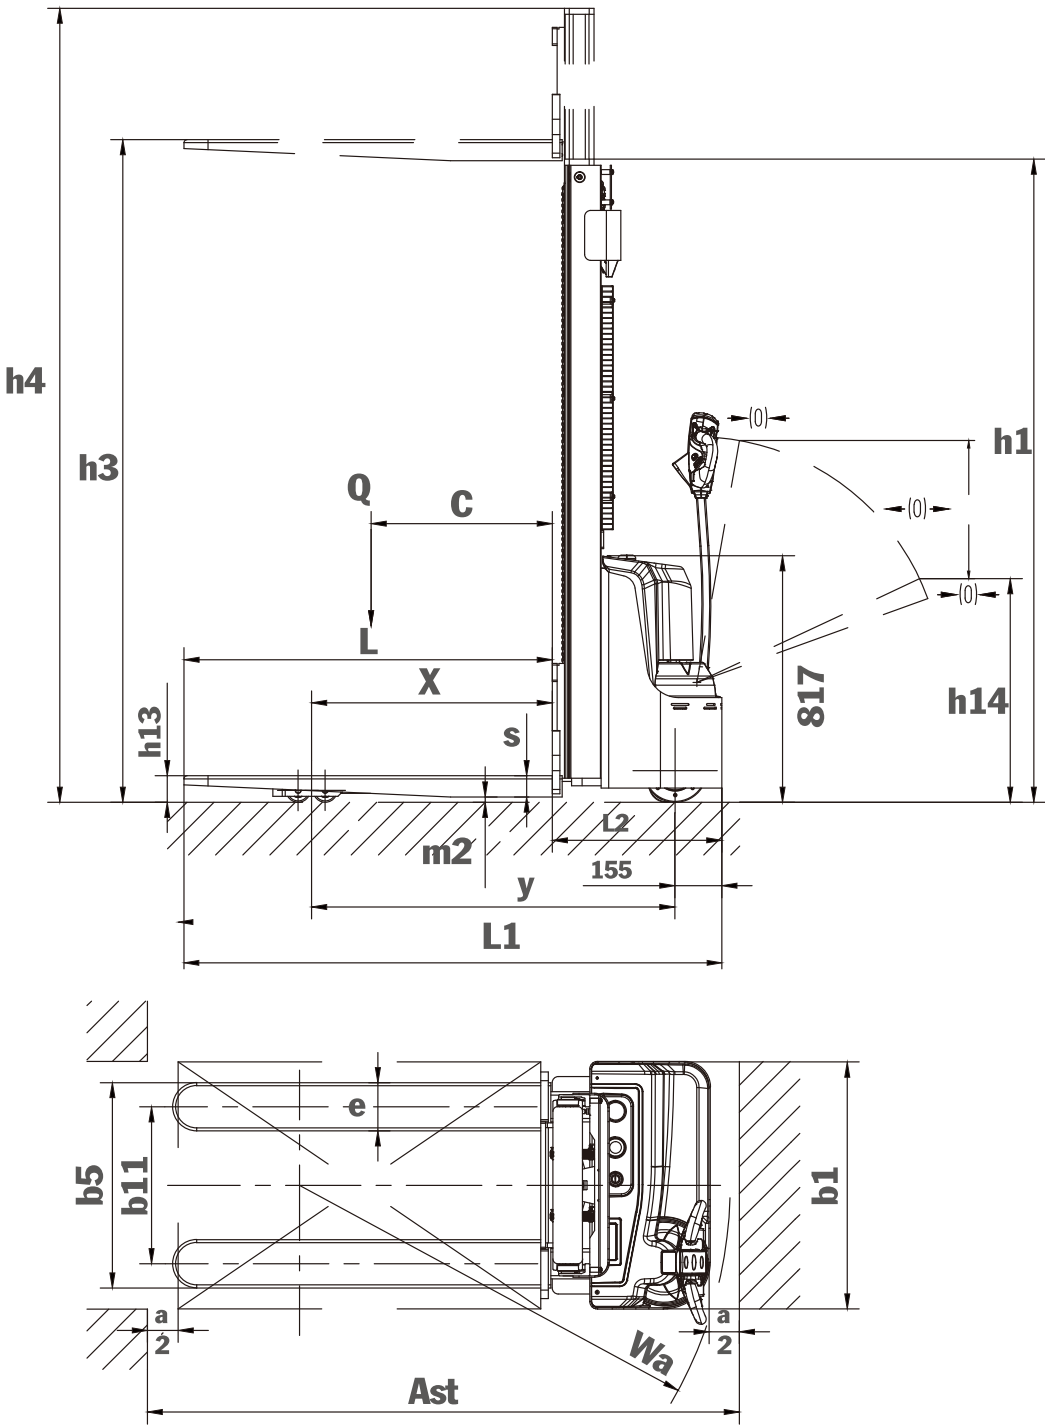

LOAD CHART

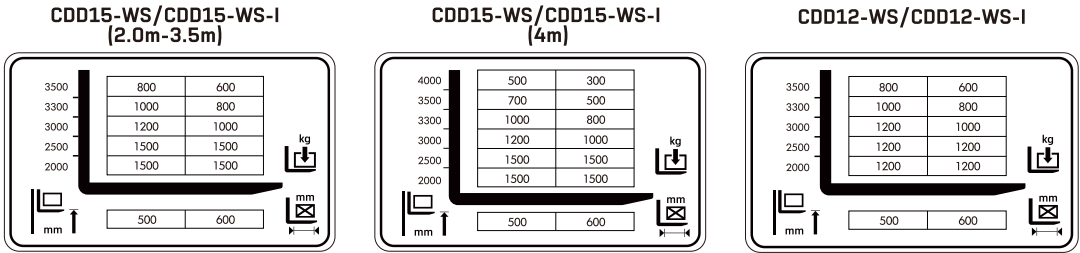

WS Electric Pedestrian Stacker Specification


Distinguishing mark	1.1	Manufacturer			HANGCHA GROUP CO.,LTD.	
	1.2	Manufacturer's type designation			CTD15-WS	CTD15-WS-I
	1.3	Drive			Battery	Battery
	1.4	Operator type			Pedestrian	Pedestrian
	1.5	Load capacity /rated load	Q	kg	1500	1500
	1.6	Load centre distance	c	mm	600	600
	1.8	Load distance, centre of drive axle to fork	x	mm	768	768
	1.9	Wheelbase	y	mm	1218	1218
	Weight	2.1	Service weight (without battery)		kg	635
2.2		Service weight[with 71Ah battery or 60Ah Li-battery]		kg	681	652
2.3		Service weight (with 89Ah battery)		kg	686	659
2.4		Axle loading, laden front/rear		kg	645/1506	645/1506
2.5		Axle loading, unladen front/rear		kg	488/163	488/163
Tyres, chassis	3.1	Wheels			Polyurethane	Polyurethane
	3.2	Wheel size, front	Ø x width	mm	Ø210x70	Ø210x70
	3.3	Wheel size, rear	Ø x width	mm	Ø100X64	Ø100X64
	3.5	Wheels, number front/rear (x = driven wheels)			1x + 0 / 2	1x + 0 / 2
	3.7	Tread, rear	b11	mm	1060/1200/1340	1060/1200/1340
Dimensions	4.2	Lowered mast height		h1	mm	2020
	4.4	Lift height		h3	mm	3000
	4.5	Extended mast height		h4	mm	3520
	4.9	Height of tiller in driving position, min./max.		h14	mm	910/1270
	4.15	Height, lowered		h13	mm	60±2
	4.19	Overall length		l1	mm	1698
	4.20	Length to face of forks		l2	mm	628
	4.21.1	Overall width across chassis		b1	mm	820
	4.21.2	Overall width across all/Outer width straddle		b2	mm	1150/1290/1430
	4.21.5	Inner width straddle		b14	mm	970/1110/1250
	4.22	Fork dimensions		s/e/l	mm	40X100X1070[1150/1220]
	4.25	Width over forks		b5	mm	200-795
	4.32	Ground clearance, centre of wheelbase		m2	mm	40
	4.34.1	Aisle width for pallets 1000 × 1200 crossways		Ast	mm	2290
	4.34.2	Aisle width for pallets 800 × 1200 lengthways		Ast	mm	2217
	4.35	Turning radius		Wa	mm	1455
	Performance data	5.1	Travel speed, with/without load		km/h	4/4.5
5.2		Lift speed, without load		mm/s	0-185	0-185
		Lift speed, with load		mm/s	0-101	0-101
5.3		Lowering speed, without load		mm/s	22-208	22-208
		Lowering speed, with load		mm/s	26-137	26-137
5.8		Max. gradeability, with/without load		%	5/10	5/10
5.10		Service brake			Electromagnetic	Electromagnetic
Electric- engine	6.1	Drive motor rating S2 60 min		kW	0.75	0.75
	6.2	Lift motor rating at S3 15%		kW	2.5	2.5
	6.4	Battery voltage/nominal capacity K5		V/Ah	● 12/71 × 2 ○ [12/89] × 2	● 24V/60Ah ○ 24V/100Ah Li-battery
	6.5	Battery weight + / - 5%		kg	● 23.4 × 2[71Ah]/ ○ 25.8 × 2[89Ah]	●17[60Ah] ○ 24[100Ah]
	6.6	Charger		A	10	30
Addition Data	8.1	Type of drive control			DC speed control	DC speed control
	8.4	Sound level at the driver's ear according to EN 12053		dB(A)	<75	<75

Note: 1kgs=2.2lbs, 25.4mm=1inch


- standard ○ option

Mast Dimensions

Mast types	Lift height h3(mm)	Lowered mast height h1(mm)	Free lift height h2(mm)	Extended mast height h4(mm)
Duplex Mast	2000	1520	/	2520
	2500	1770	/	3020
	3000	2020	/	3520
	3300	2170	/	3820
	3500	2270	/	4020
	4000	2590		4840

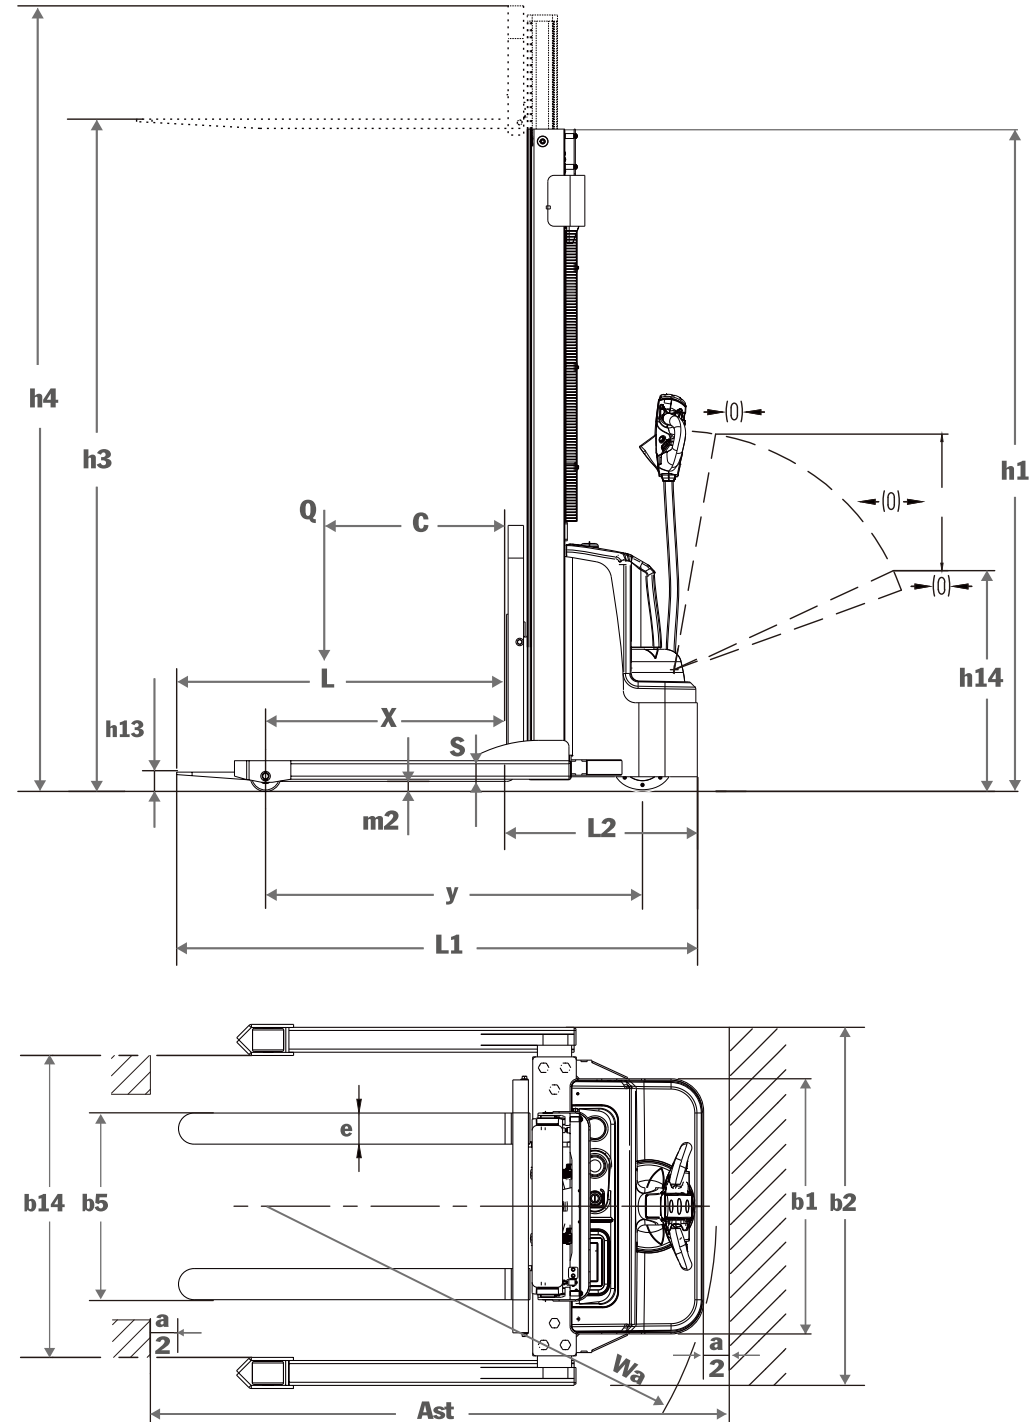

LOAD CHART

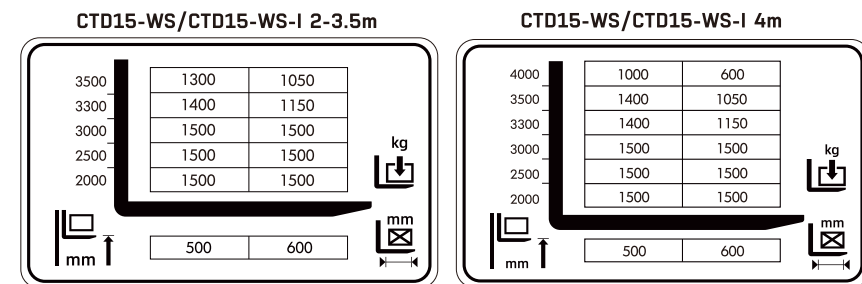

WS Electric Pedestrian Stacker Specification



Distinguishing mark	1.1	Manufacturer			HANGCHA GROUP CO., LTD.
	1.2	Manufacturer's type designation			CDD15-WSS
	1.3	Drive			Lead-acid battery
	1.4	Operator type			Rider
	1.5	Load capacity/rated load	Q	kg	1500
	1.6	Load centre distance	c	mm	600
	1.8	Load distance, centre of drive axle to fork	x	mm	796
	1.9	Wheelbase	y	mm	1250
	2.1	Service weight (with Lead-acid battery 210Ah)		kg	702.6
Weight	2.2	Axle loading, laden front/rear		kg	659/1538.6
	2.3	Axle loading, unladen front/rear		kg	527/175.6
Tyres, chassis	3.1	Wheels			PU
	3.2	Wheel size, front	∅ x width	mm	φ210x70
	3.3	Wheel size, rear	∅ x width	mm	φ80X70
	3.4	Additional wheels (dimensions)	∅ x width	mm	φ115X55
	3.5	Wheels, number front/rear [x = driven wheels]			1x + 2 / 4
	3.6	Tread, front	b10	mm	610
	3.7	Tread, rear	b11	mm	400[560 fork width]/ 520[680 fork width]
Dimensions	4.2	Lowered mast height	h1	mm	1730
	4.4	Lift height	h3	mm	2500
	4.5	Extended mast height	h4	mm	2935
	4.9	Height of tiller in driving position, min./max.	h14	mm	990/1225
	4.15	Height, lowered	h13	mm	85±2
	4.19	Overall length	l1	mm	1785(platform folded) / 2200(with plarform)
	4.20	Length to face of forks	l2	mm	705
	4.21	Overall width	b1	mm	820
	4.22	Fork dimensions	s/e/l	mm	70X160X1150
	4.25	Width over forks	b5	mm	● 560 ○ 680
	4.32	Ground clearance, centre of wheelbase	m2	mm	20 / 16
	4.34.1	Aisle width for pallets 1000 × 1200 crossways	Ast	mm	2257(platform folded) / 2687(with plarform)
	4.34.2	Aisle width for pallets 800 × 1200 lengthways	Ast	mm	2183(platform folded) / 2613(with plarform)
Performance data	4.35	Turning radius	Wa	mm	1512(platform folded) / 1942(with plarform)
	5.1	Travel speed, with/without load		km/h	4/4.5
	5.2	Lift speed, with/without load		mm/s	0-101 / 0-185
	5.3	Lowering speed, with/without load		mm/s	25.6-137 / 21.7-220
	5.8	Max. gradeability, with/without load		%	5/10
	5.10	Service brake			Electromagnetic
Electric-engine	6.1	Drive motor rating S2 60 min		kW	0.75
	6.2	Lift motor rating at S3 15%		kW	2.5
	6.4	Battery voltage/nominal capacity [k5]		V/Ah	● 12/106x2 ○ 12/210x2
	6.5	Charger		A	10
Addition Data	8.1	Type of drive control			DC speed control
	8.4	Sound level at the driver's ear according to EN 12053		dB(A)	<75

Note: 1kgs=2.2lbs, 25.4mm=1inch

- standard ○ option


Mast Dimensions

Mast types	Lift height h3[mm]	Lowered mast height h1[mm]	Free lift height h2[mm]	Extended mast height h4[mm]
Duplex Mast	2000	1480	/	2435
	2500	1730	/	2935
	3000	1980	/	3435
	3300	2130	/	3735
	3500	2230	/	3935
	4000	2480		4435

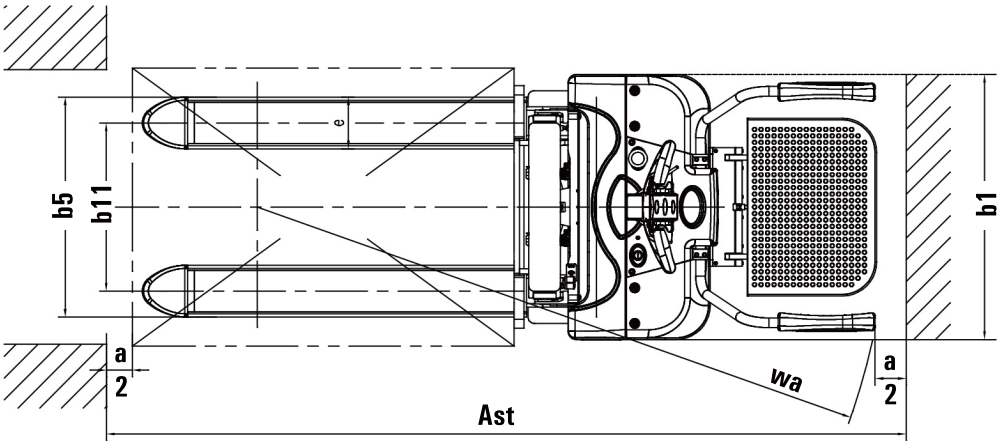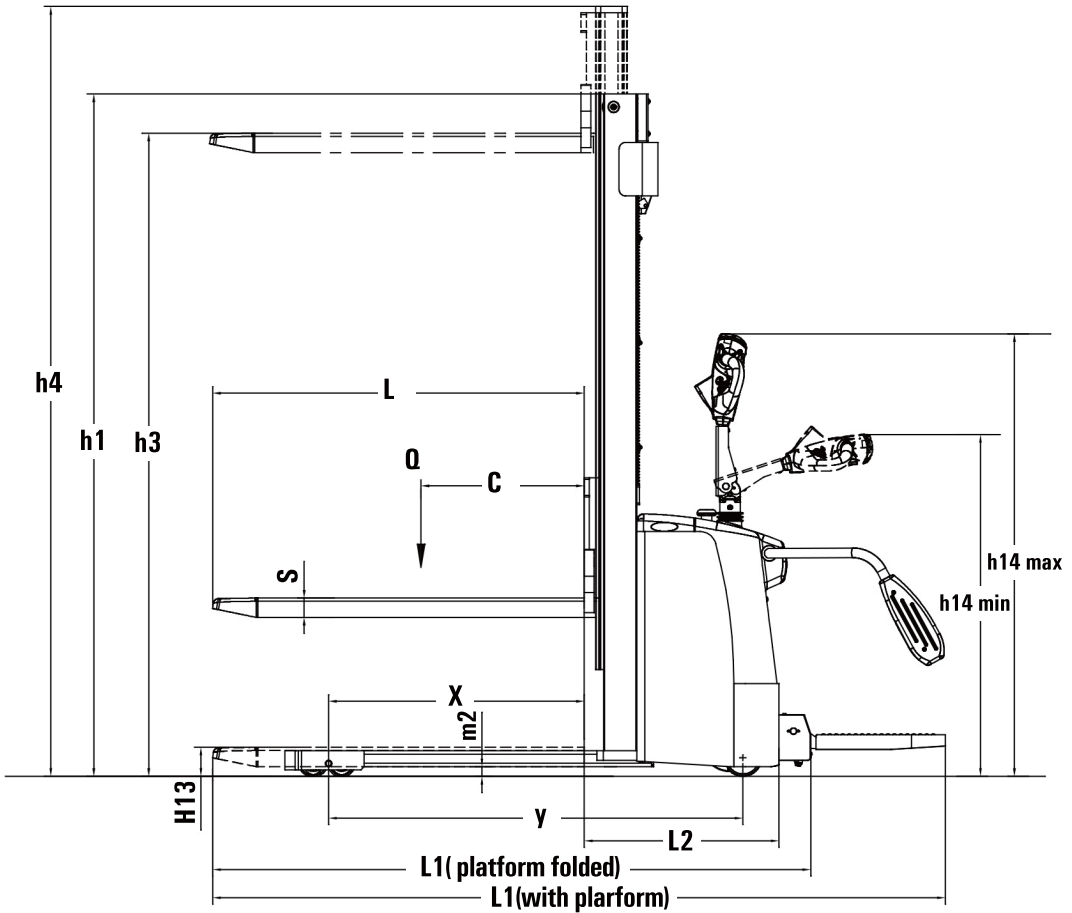

LOAD CHART

CDD-WSS With 106Ah lead-acid battery

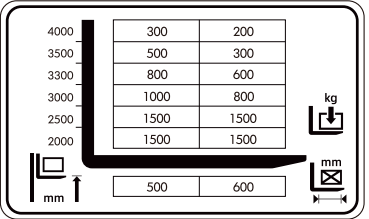

CDD-WSS With 210Ah lead-acid battery

